

TRAINING
COURSE


**EUMETSAT/
ECMWF
NWP-SAF
satellite data
assimilation**



**ECMWF/EUMETSAT NWP-SAF
Satellite data assimilation Training Course**

**The infrared spectrum,
measurement and
information content**



The IR spectrum in a **Tropical** and **Polar** atmosphere

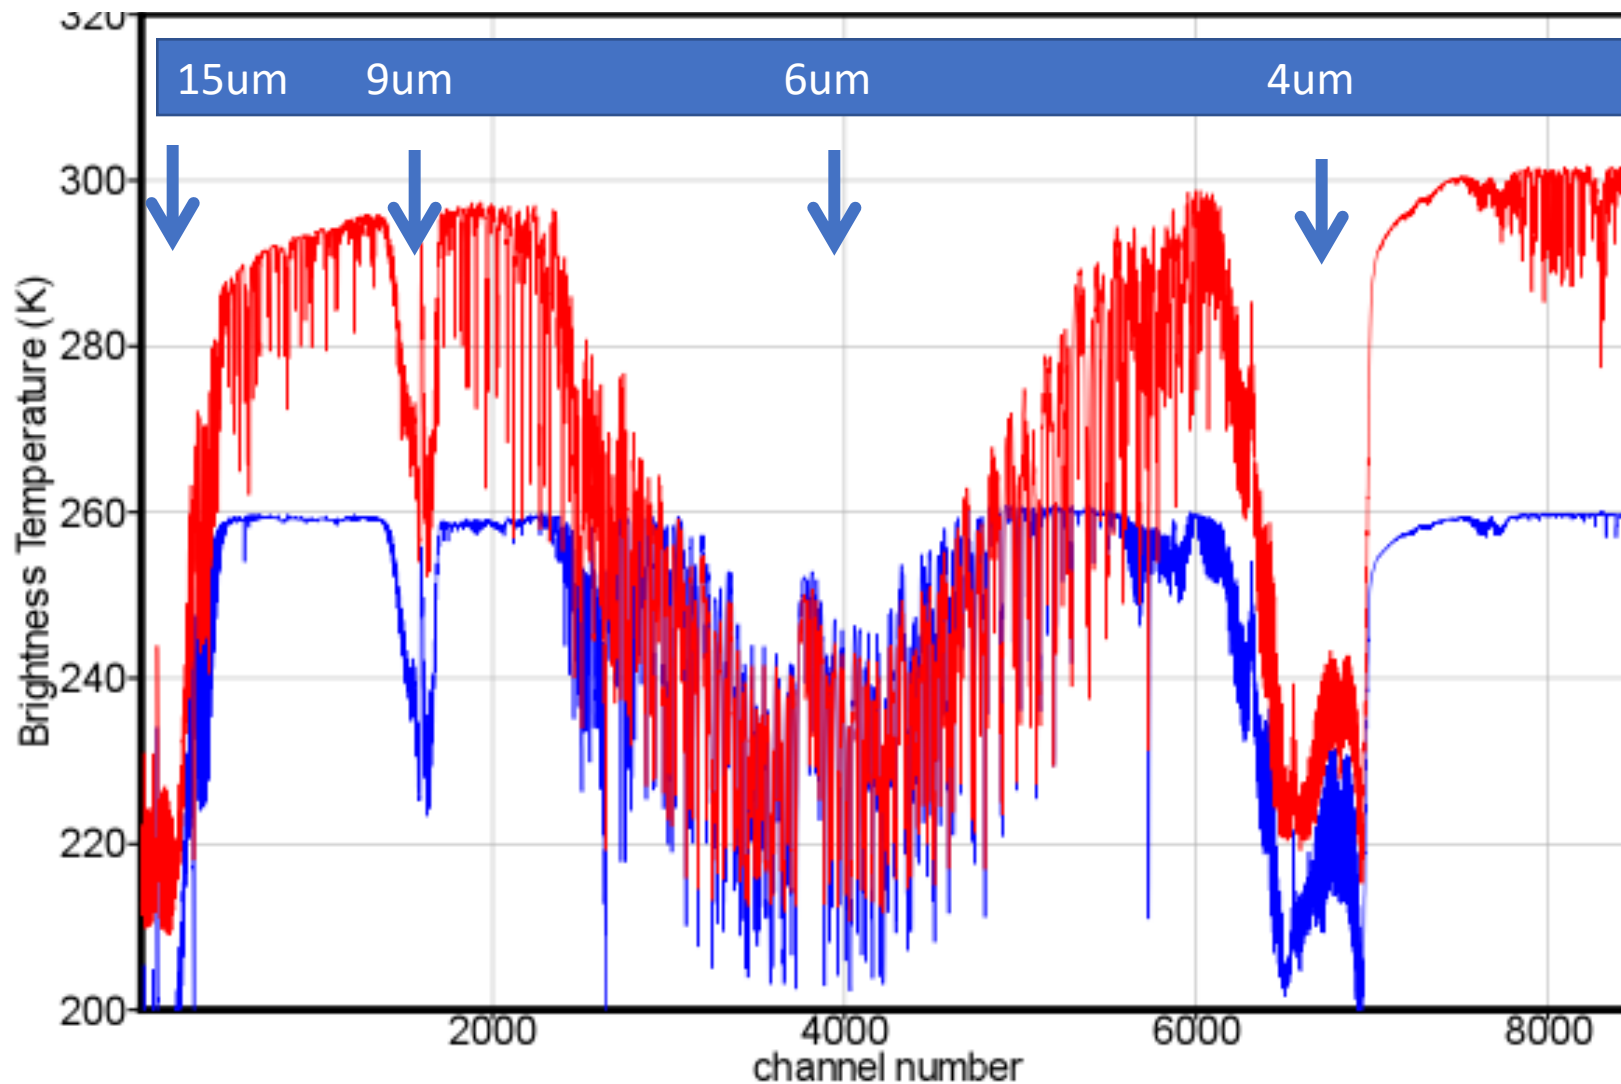

Why infrared ...?

....high spectral resolution

Infrared v Microwave

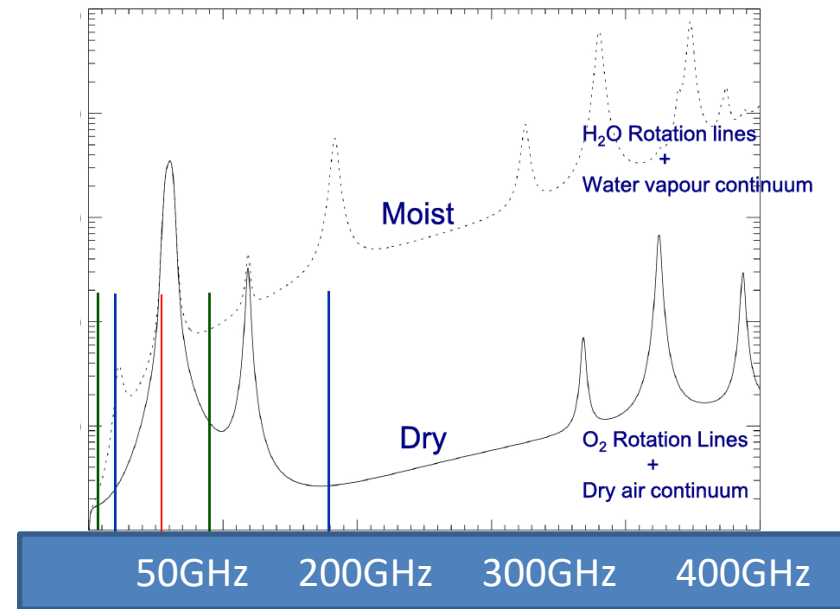
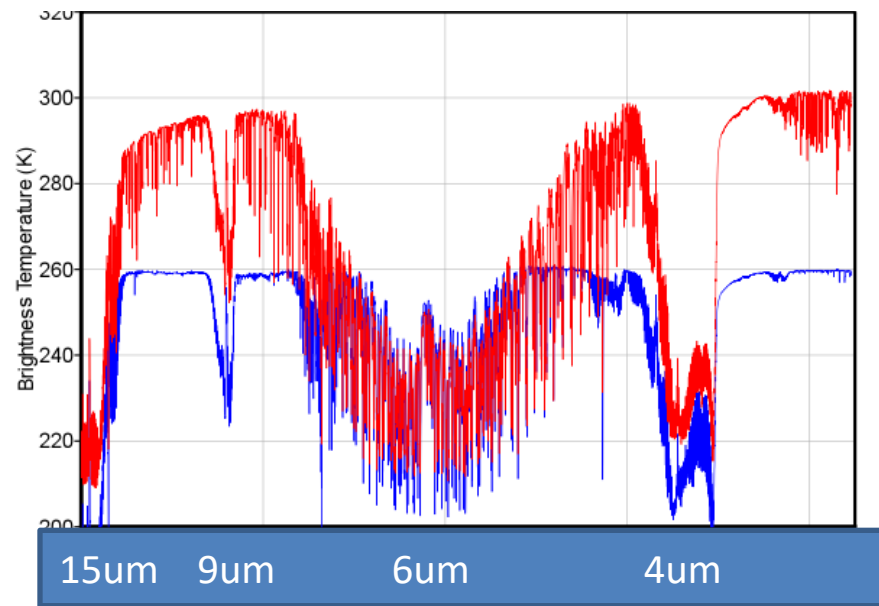


In the infrared, many of the thousands of distinct spectral lines are resolvable – in the microwave there are only a handful of resolved features due to pressure broadening!

Why high spectral resolution..?



...high vertical resolution

Infrared v Microwave

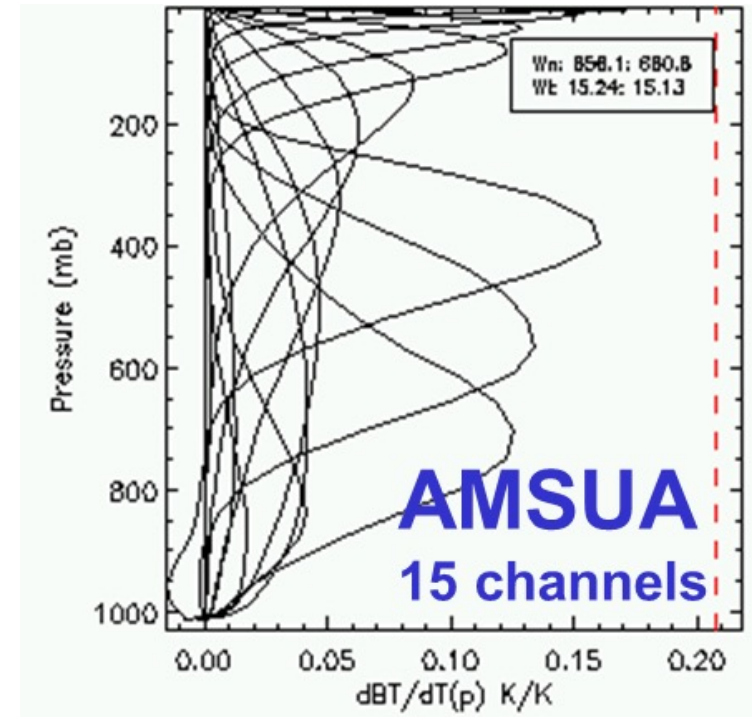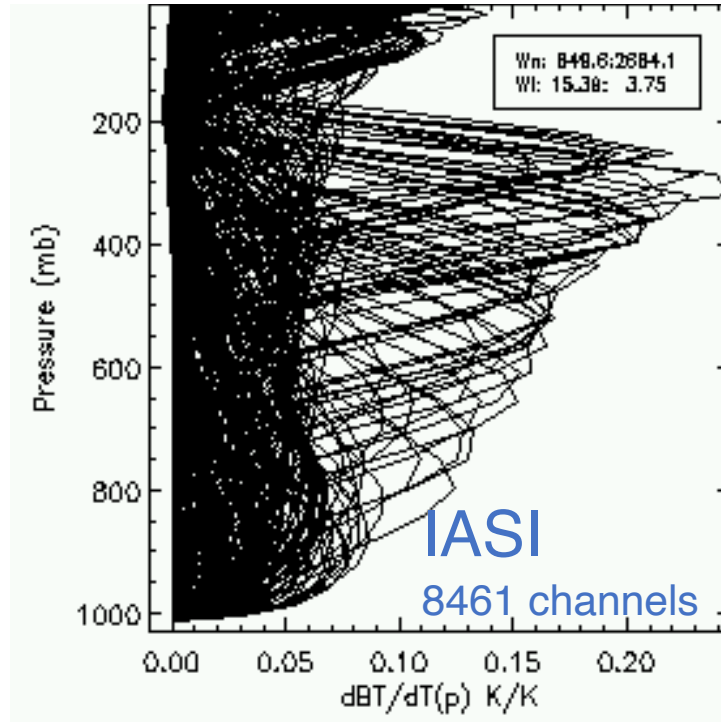

Each channel has a slightly different weighting function – providing information on a slightly different part of the atmosphere

Infrared v Microwave

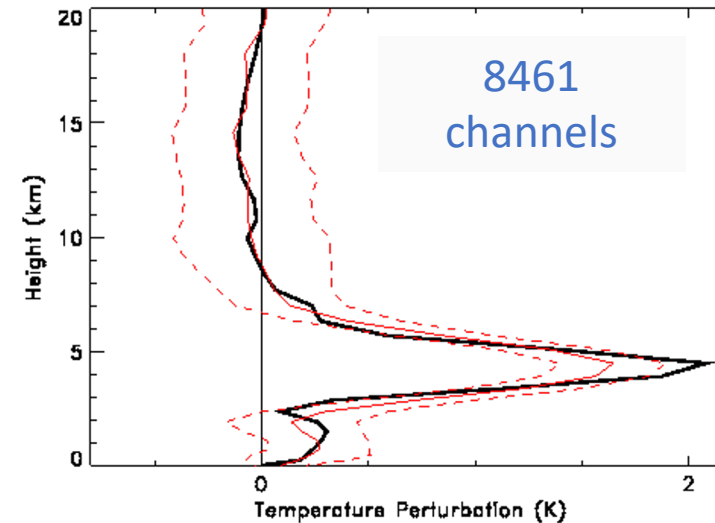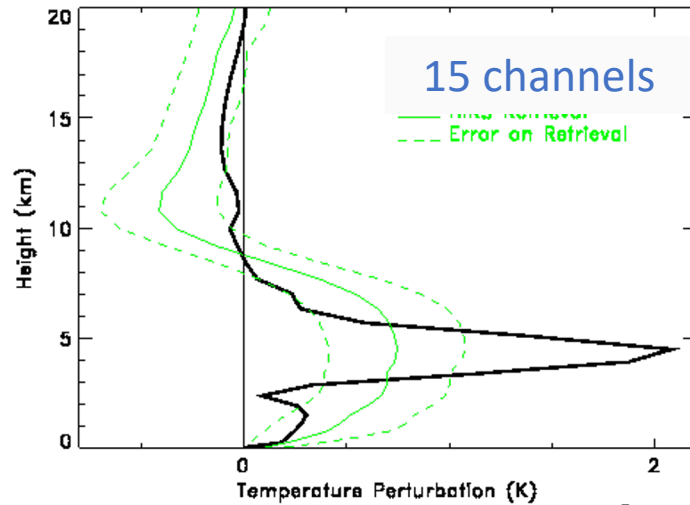


With only a few channels fine vertical feature in the atmosphere are not resolvable – but become more visible with more channels



High Spectral Resolution IR sounders on Polar- orbiting Spacecraft

High Spectral Resolution IR sounders on Polar-orbiting Spacecraft


HIRAS (China)

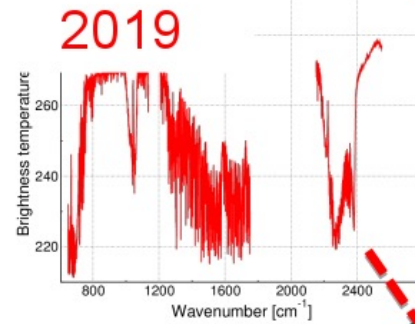

AIRS (U.S.A.)

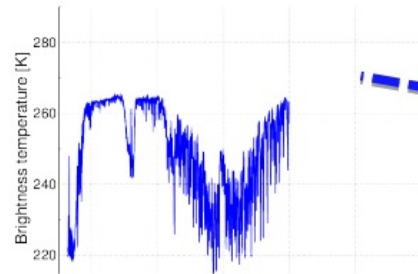
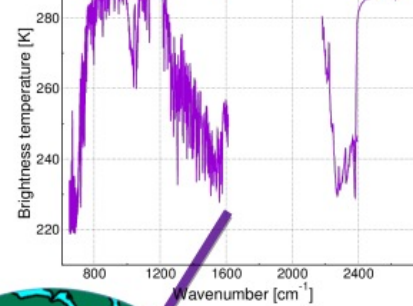


IKFS-2 (Russia)

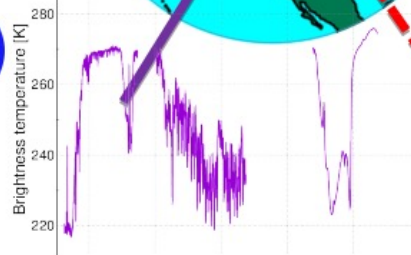


CrIS (U.S.A.)

IASI's (Europe)

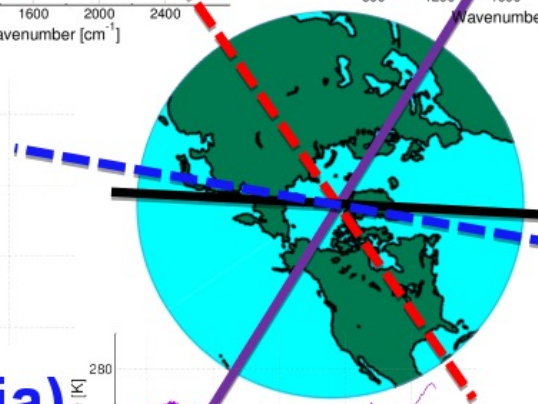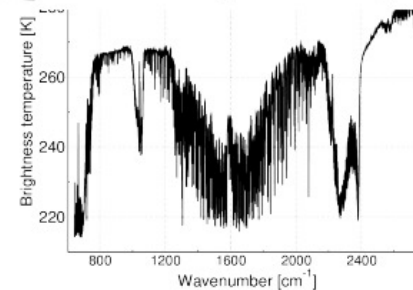


Operational High Spectral Resolution IR sounders

Instrument/ Satellite/	No. of Channel	Spectral Range	Spectral Res.	IFOV	Type/ Orbit
AIRS/ Aqua(EOS-PM)/	2378	650-2760cm ⁻¹	~1cm ⁻¹	13.5k m	Grating Spectrometer/ Polar
IASI/ MetOp/	8461	645-2760cm ⁻¹	0.5cm ⁻¹	12km	Interferometer /Polar
CrIS/ NPP & JPSS/	1400	635-2450cm ⁻¹	1.125- 4.5cm ⁻¹	12km	Interferometer /Polar

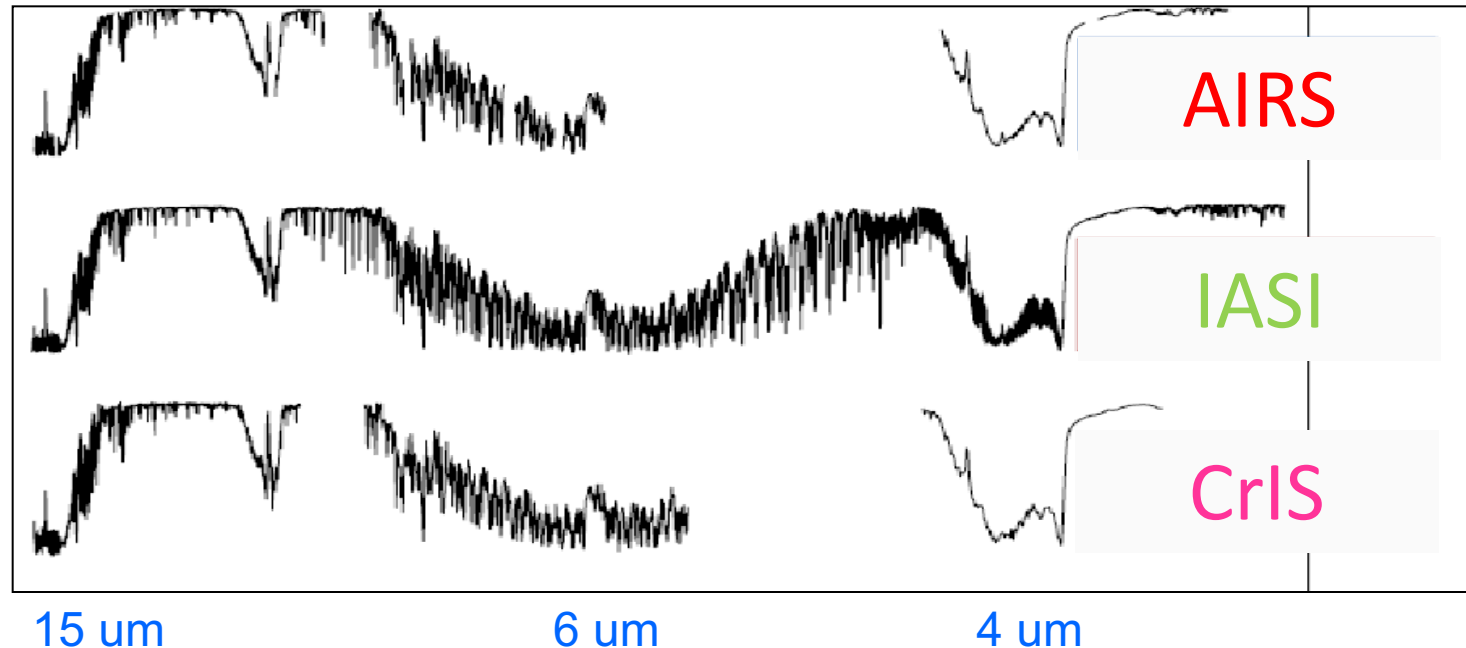


IASI v CrIS

Cross-track Infrared Sounder (CrIS)

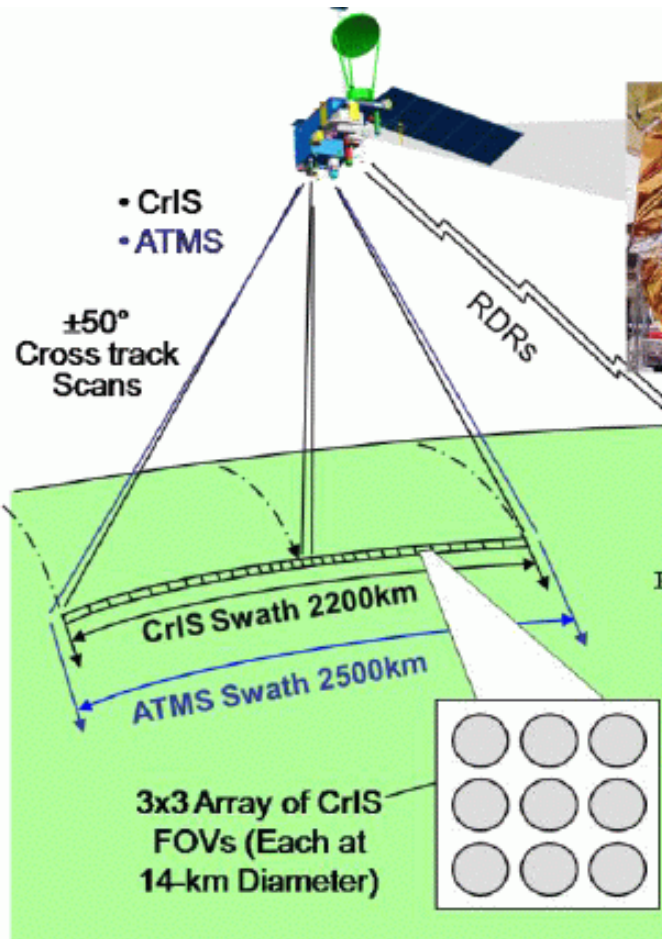


Infrared Atmospheric Sounding Interferometer (IASI)

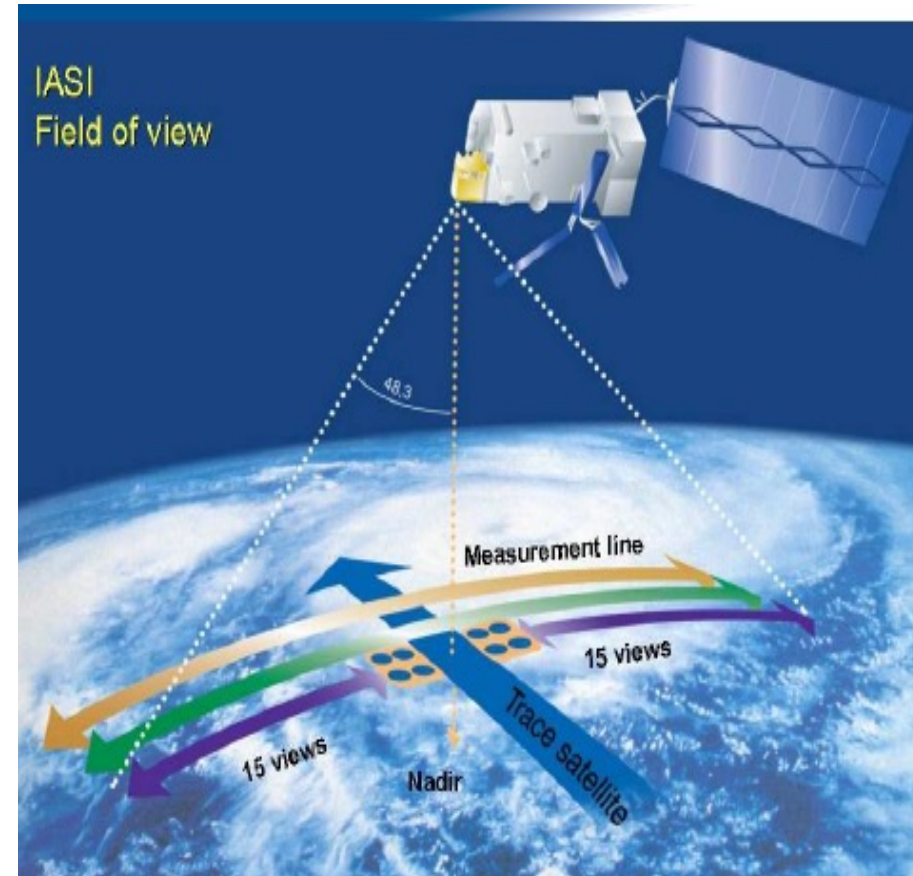





IASI has higher spectral resolution compared to CrIS

Instrument/ Satellite/	No. of Channel	Spectral Range	Spectral Res.	IFOV	Type/ Orbit
AIRS/ Aqua(EOS-PM)/	2378	650-2760cm⁻¹	~1cm⁻¹	13.5k m	Grating Spectrometer/ Polar
IASI/ MetOp/	8461	645-2760cm⁻¹	0.5cm⁻¹	12km	Interferometer /Polar
CrIS/ NPP & JPSS/	1400	635-2450cm⁻¹	1.125- 4.5cm⁻¹	12km	Interferometer /Polar

IASI has higher noise compared to CrIS

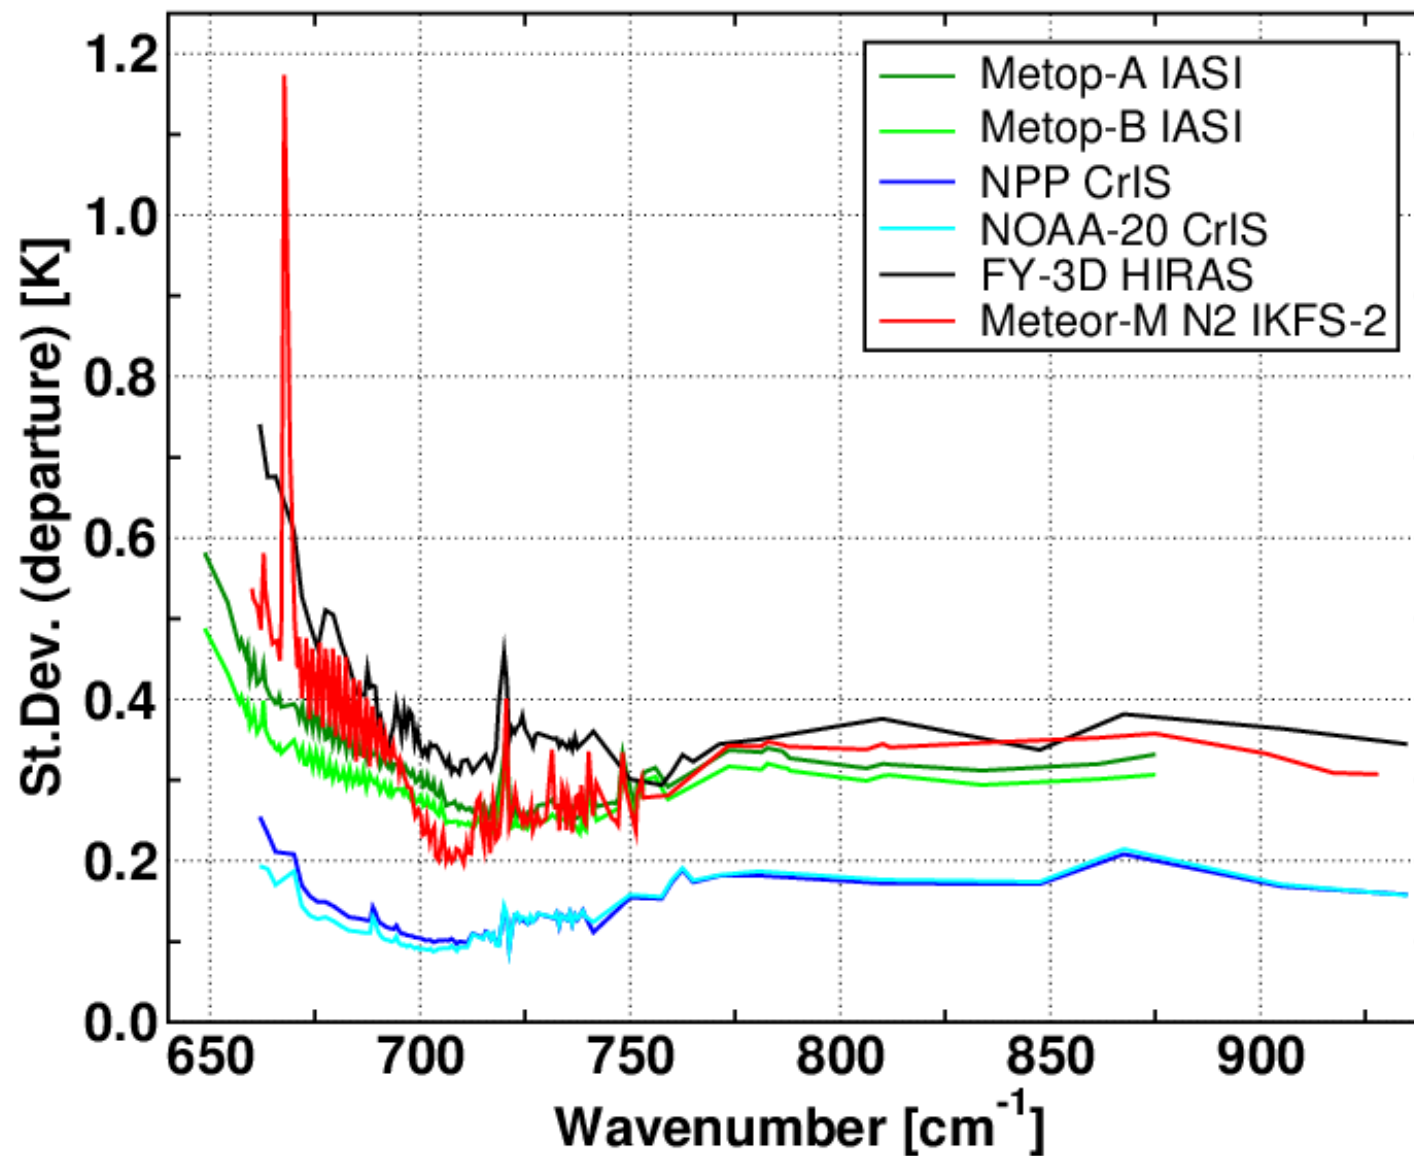

CrIS has stronger inter-channel correlations than IASI

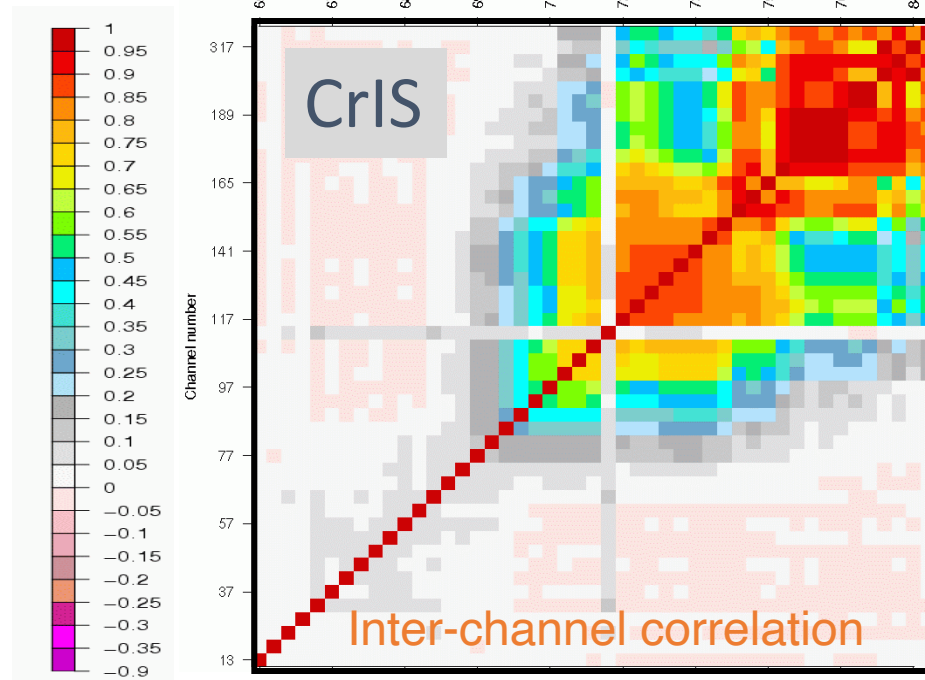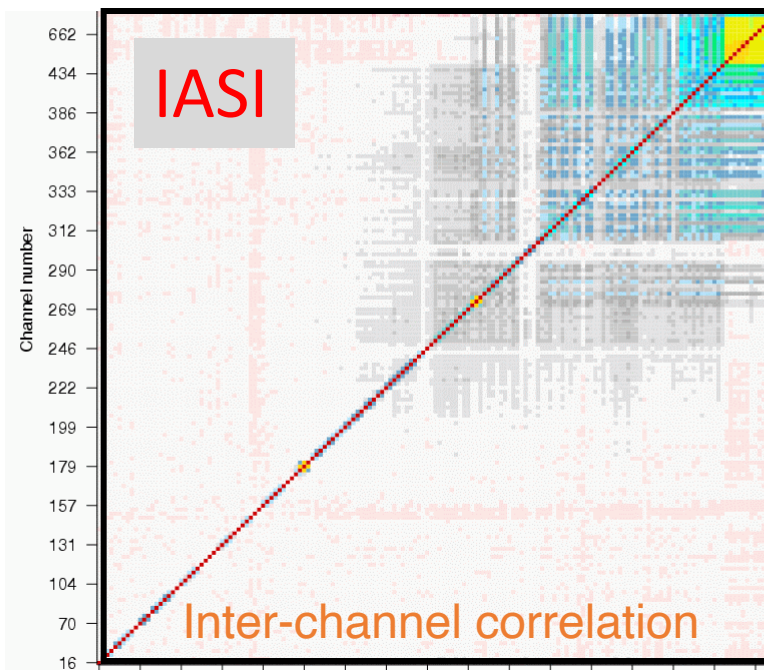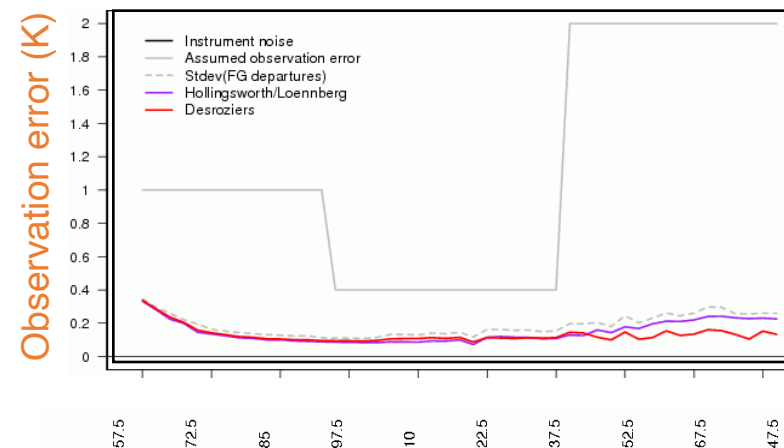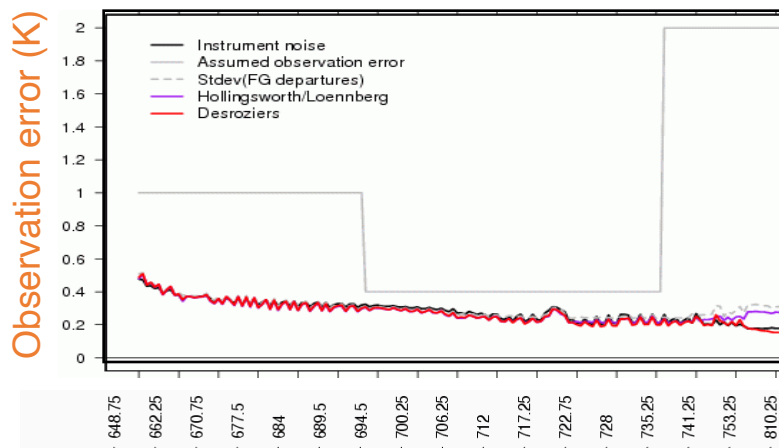


High Spectral Resolution IR sounders on GEO Spacecraft


Preparing for MTG-S IRS!

First ever GEO High Spectral Resolution IR sounder


FY- 4A GIIRS radiance observations
20190301

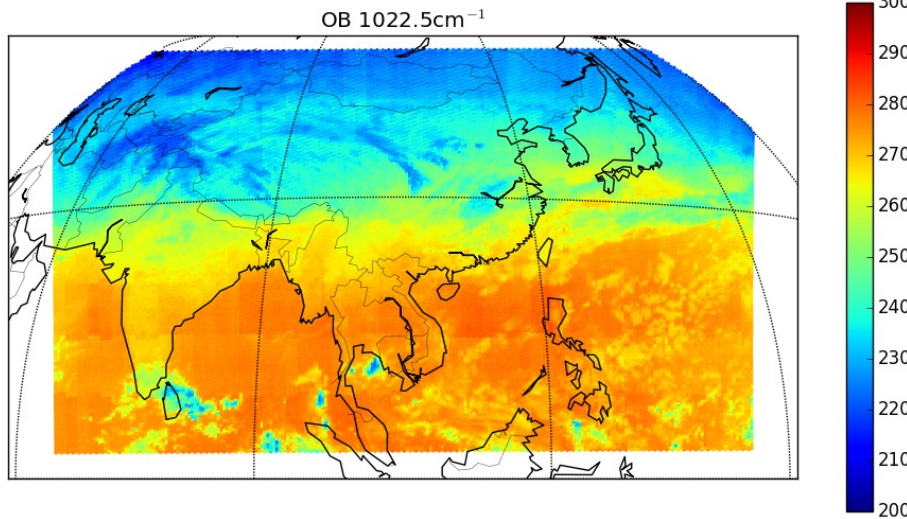

Initial evaluations suggested the GIIRS radiances were significantly more noisy than similar IASI channels

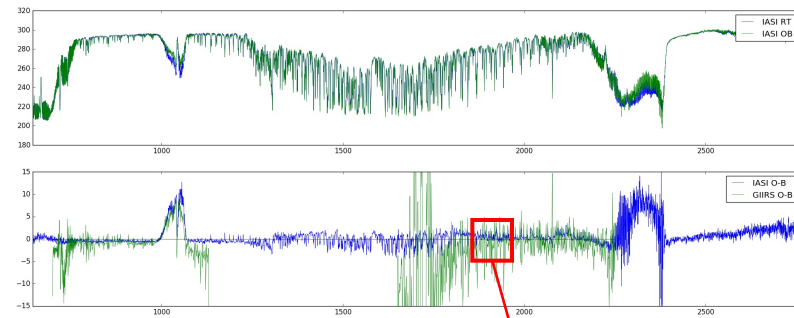

Cross checking with model simulations and IASI suggests much of the noise can be explained (and removed) with a spectral shift

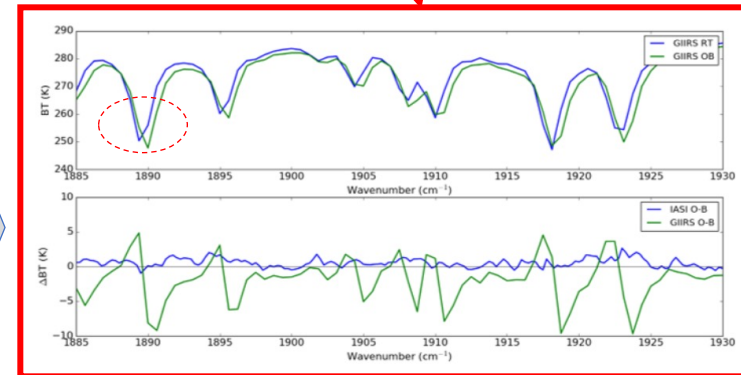

The infrared spectrum


Case study:

The assimilation of IASI

What does IASI measure


(and what do we assimilate)

The infrared spectrum of atmospheric radiation

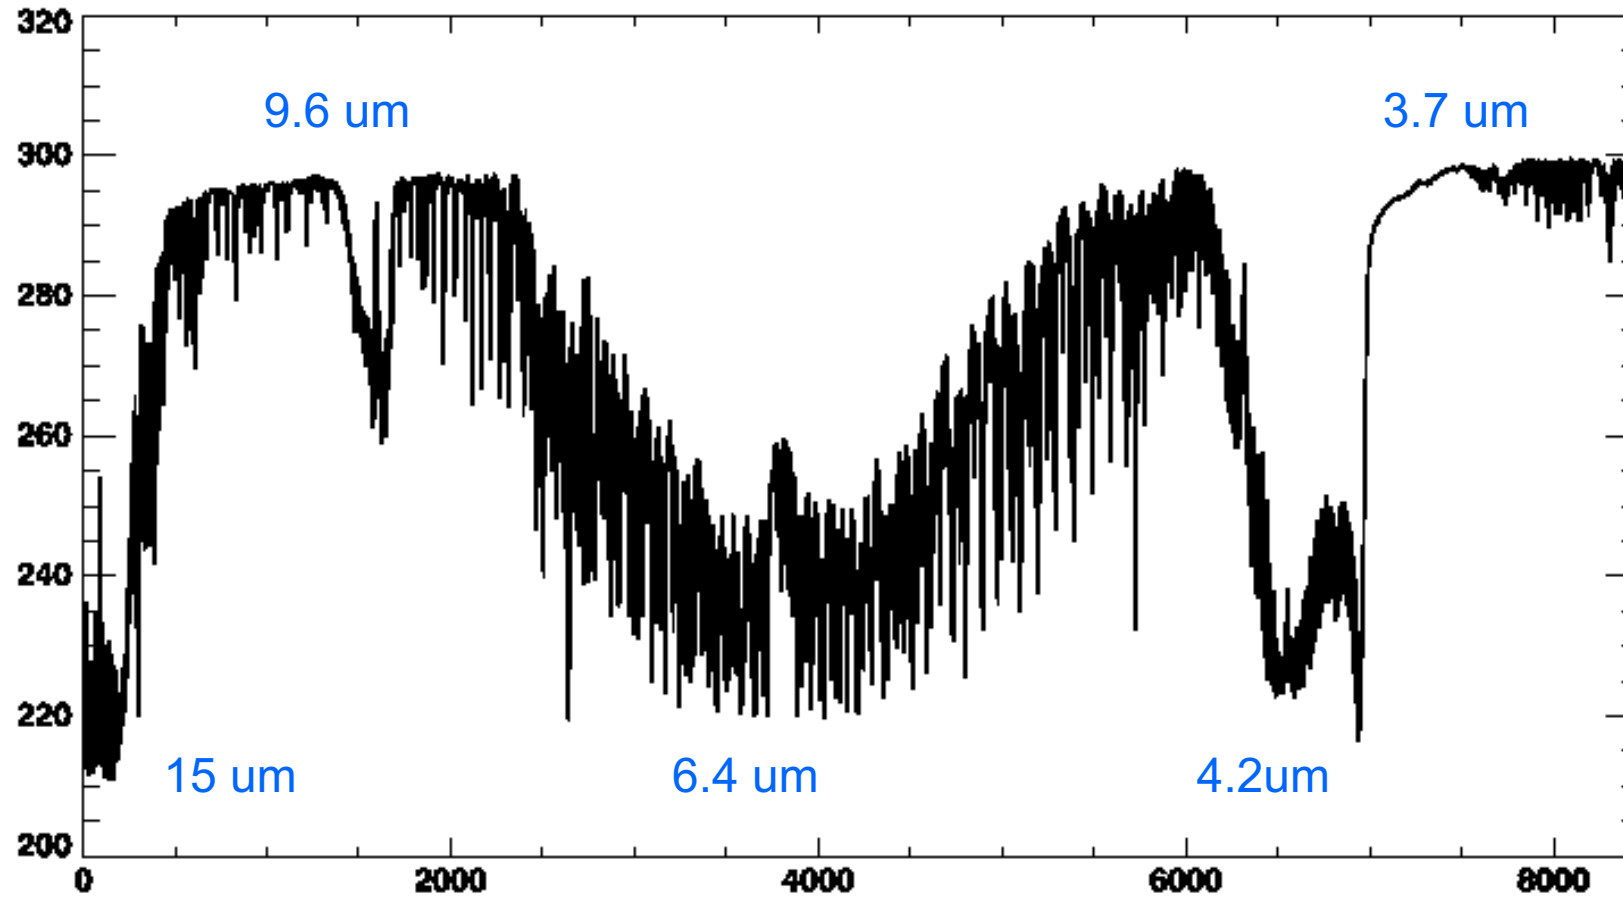


The infrared spectrum of atmospheric radiation

The long-wave temperature sounding band

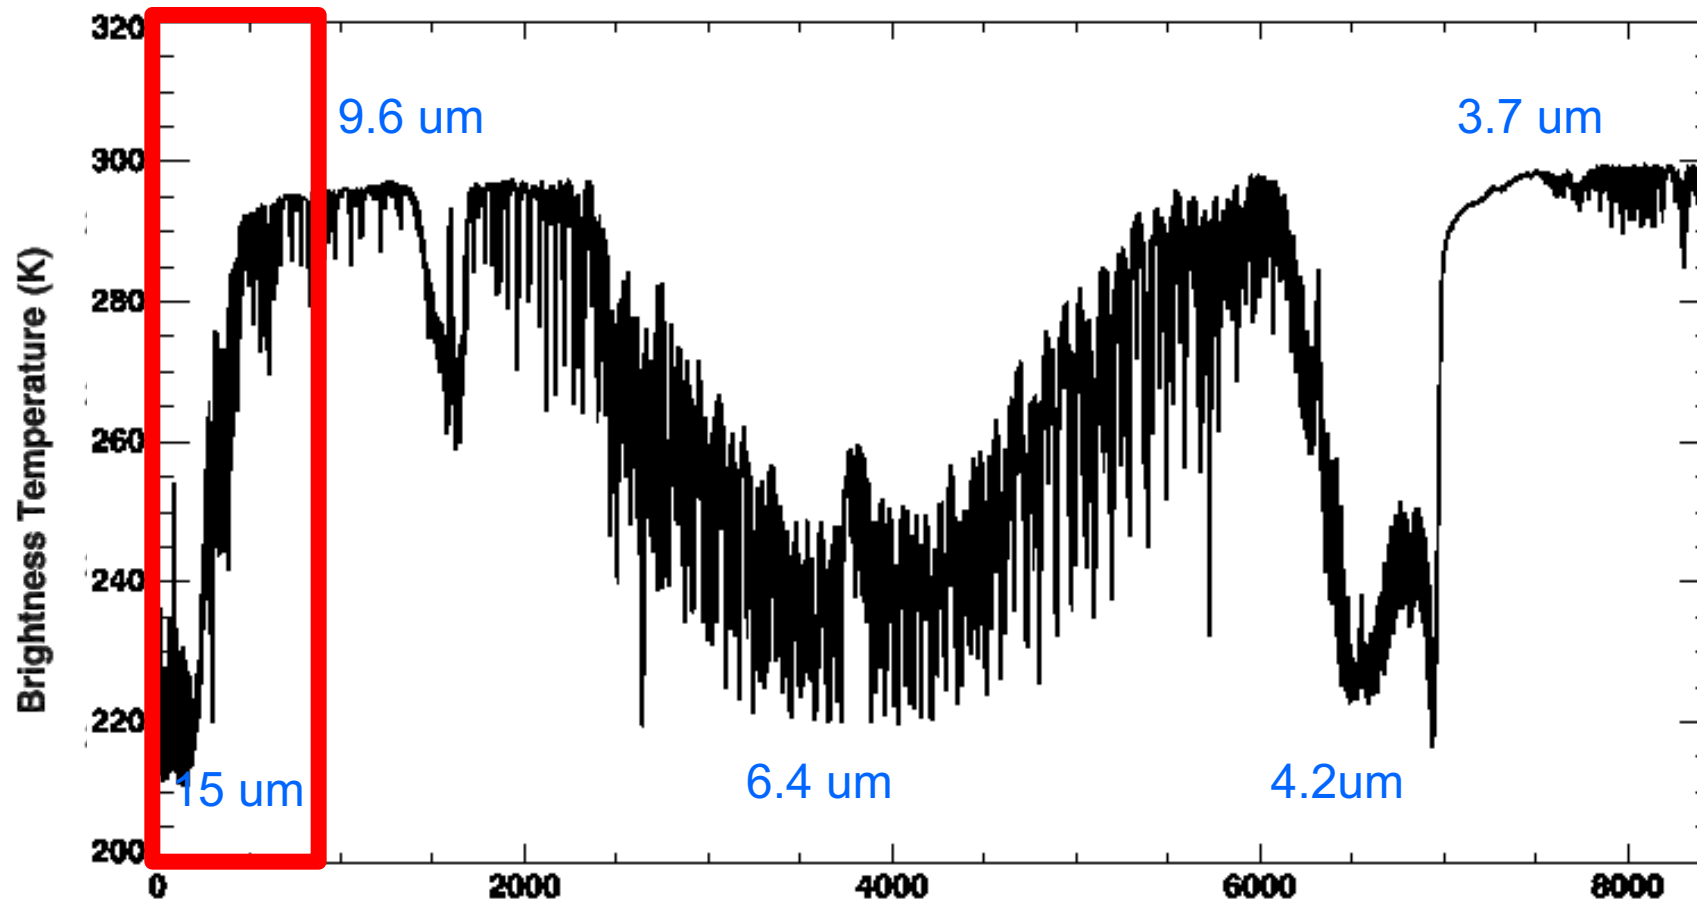


~ 150 channels assimilated

Zoom of long-wave temperature sounding channel usage for IASI

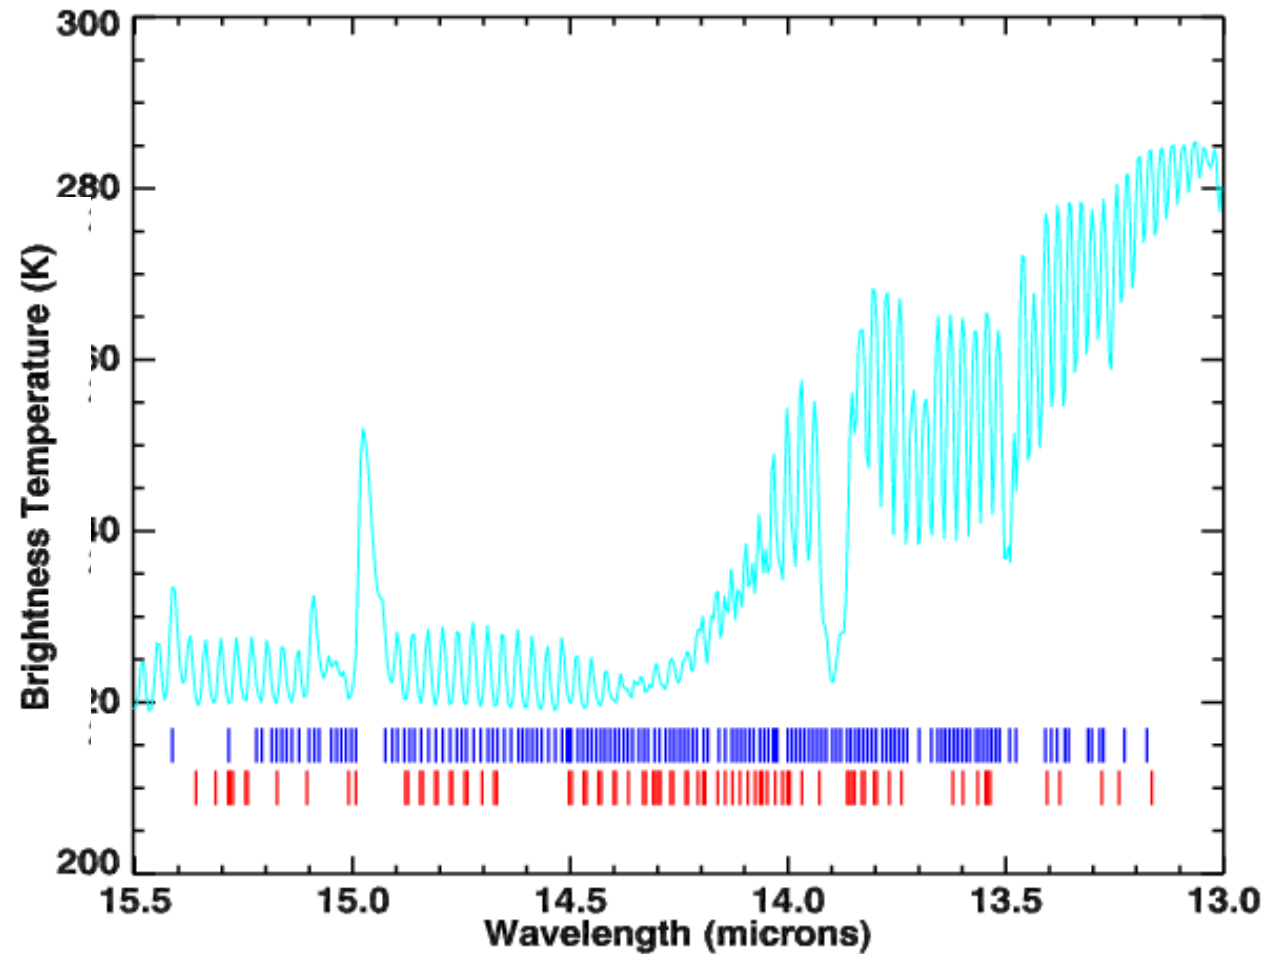

The infrared spectrum of atmospheric radiation


The long-wave ozone sounding band

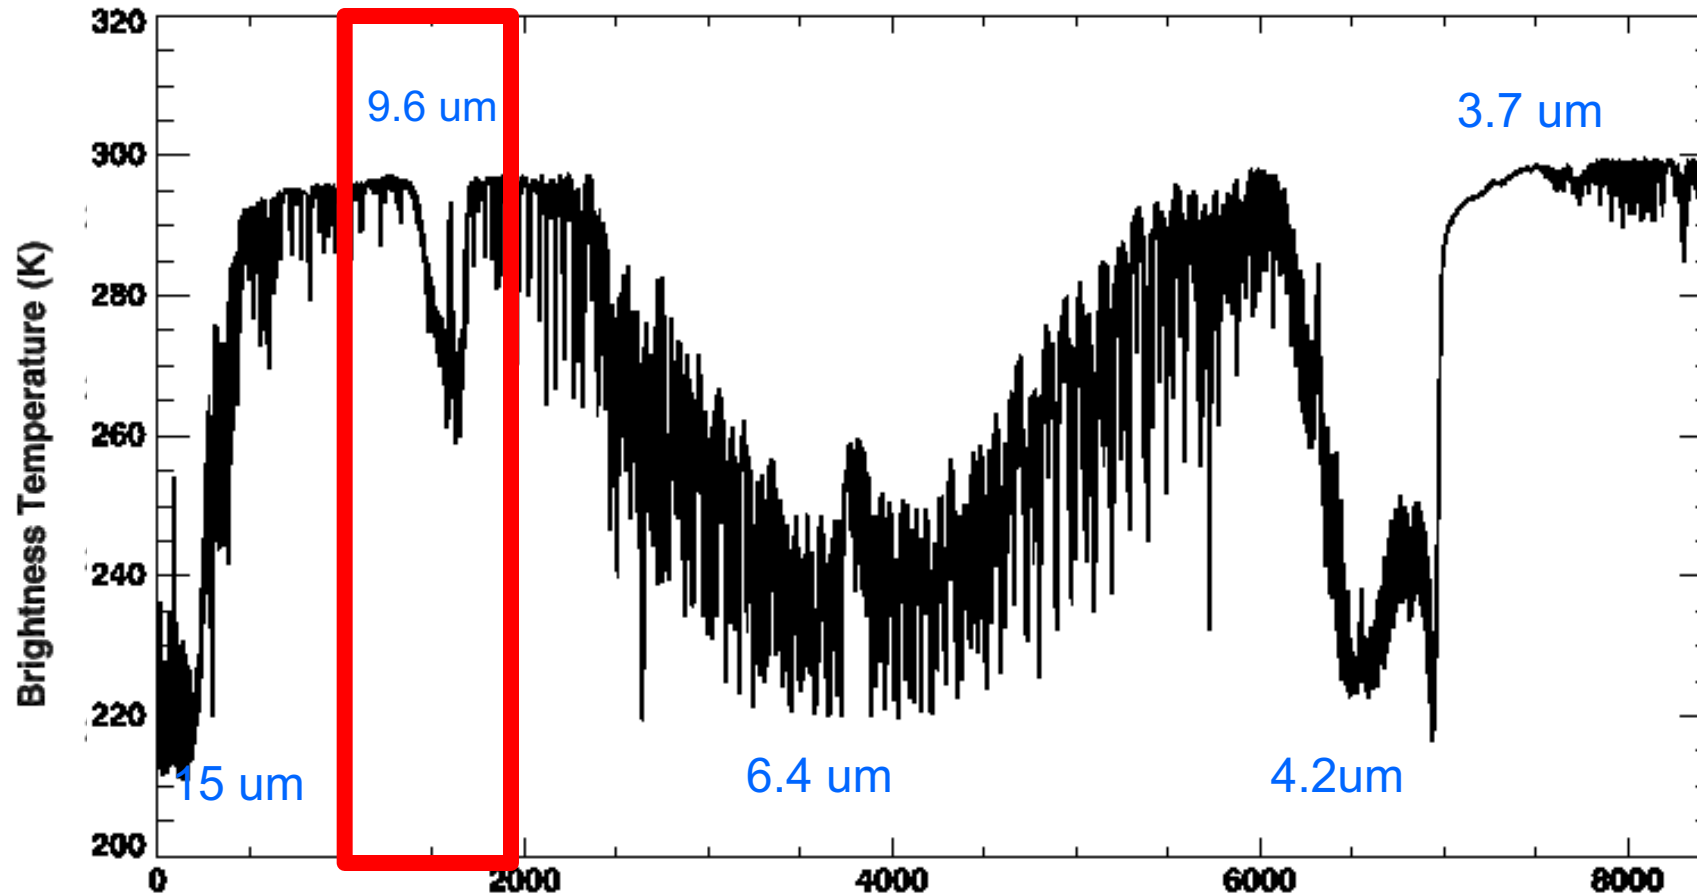

~ 20 channels assimilated

The infrared spectrum of atmospheric radiation


The mid-wave water vapour sounding band

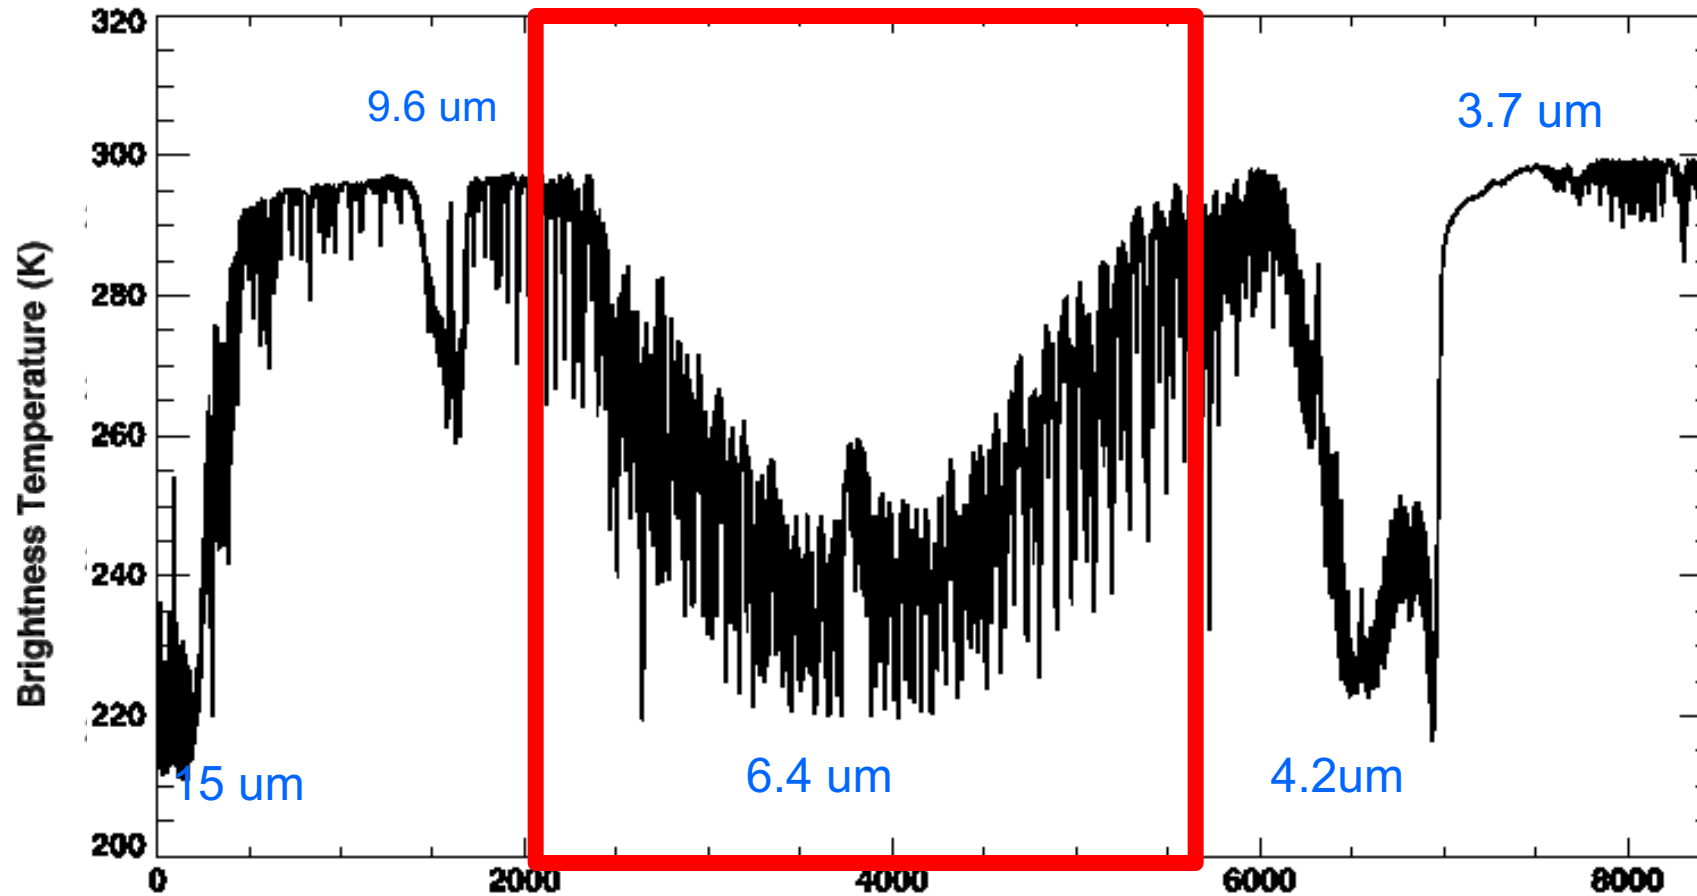

~ 50 channels assimilated

The infrared spectrum of atmospheric radiation


The short-wave temperature sounding band

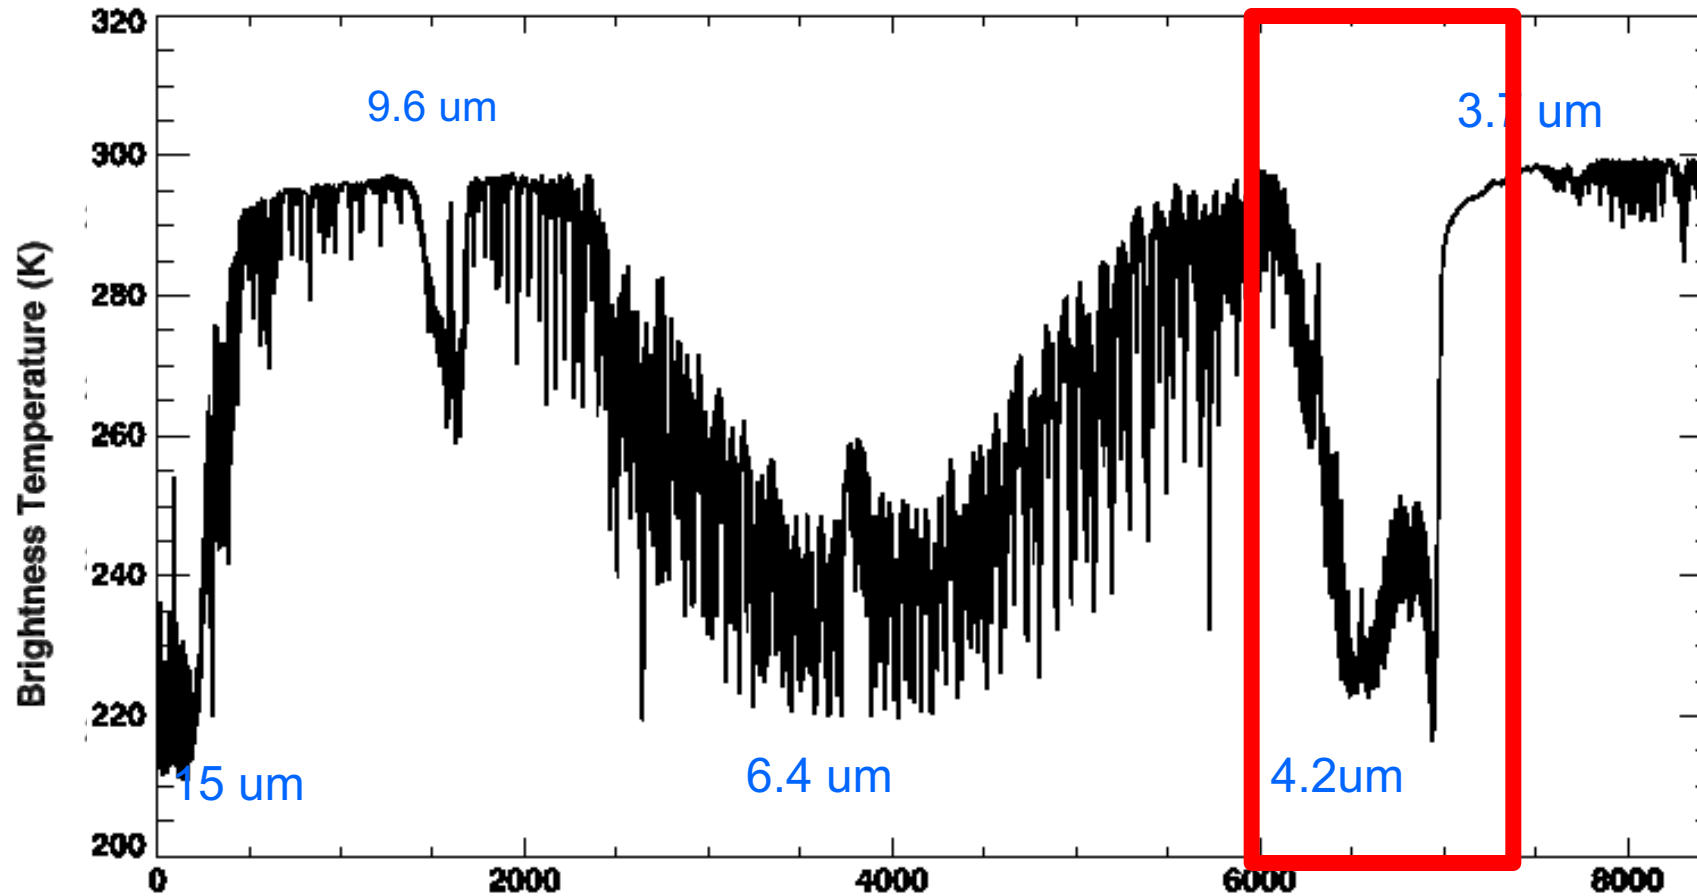

~ 0 channels assimilated – IASI noise high

The infrared spectrum of atmospheric radiation

The surface sensing channels (window channels)

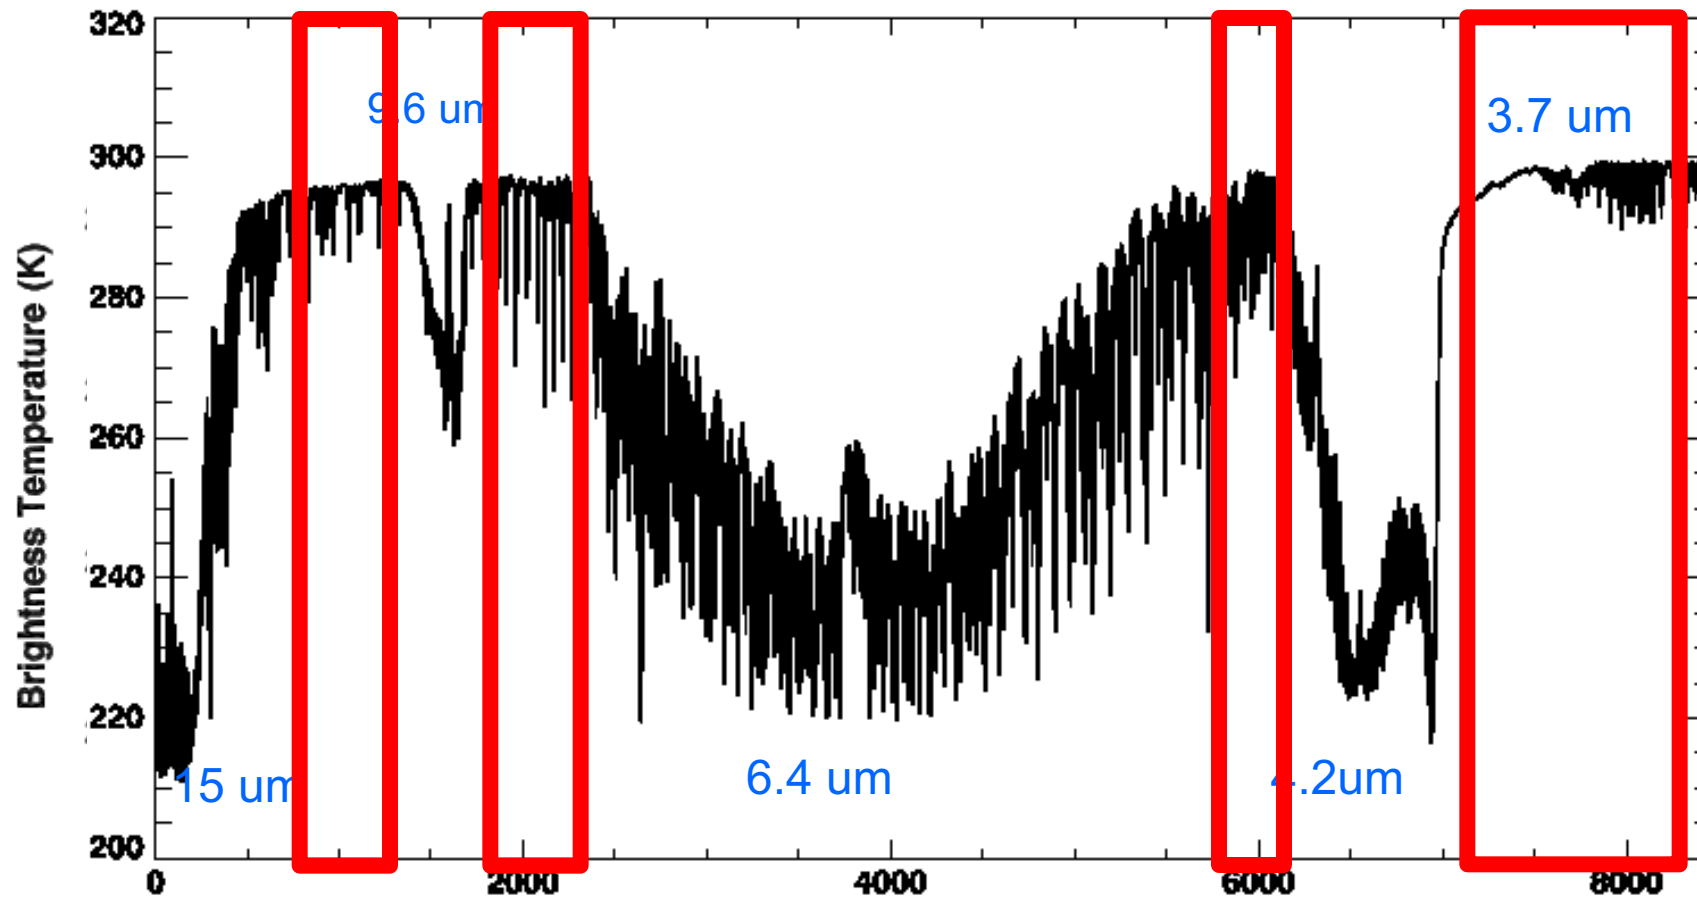


channels mostly used for cloud detection

Weighting functions of IASI sounding channels

Atmospheric sounding channels

...selecting channels where there is **no** contribution from the **surface**....
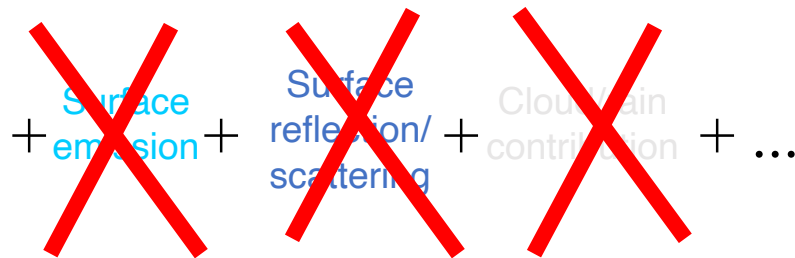
$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection/scattering} + \text{Cloud/aerosol contribution} + \dots$$


ATMOSPHERIC TEMPERATURE SOUNDING

If radiation is selected in an **atmospheric sounding channel** for which

$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz$$


and we define a function $H(z) = \left[\frac{d\tau}{dz} \right]$

When the primary absorber is a well mixed gas (e.g. oxygen or CO₂) with known concentration it can be seen that the **measured radiance** is essentially a **weighted average of the atmospheric temperature profile**, or


$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) H(z) dz$$

The function $H(z)$ that defines this vertical average is known as a **WEIGHTING FUNCTION**


Strong absorbing sounding channels

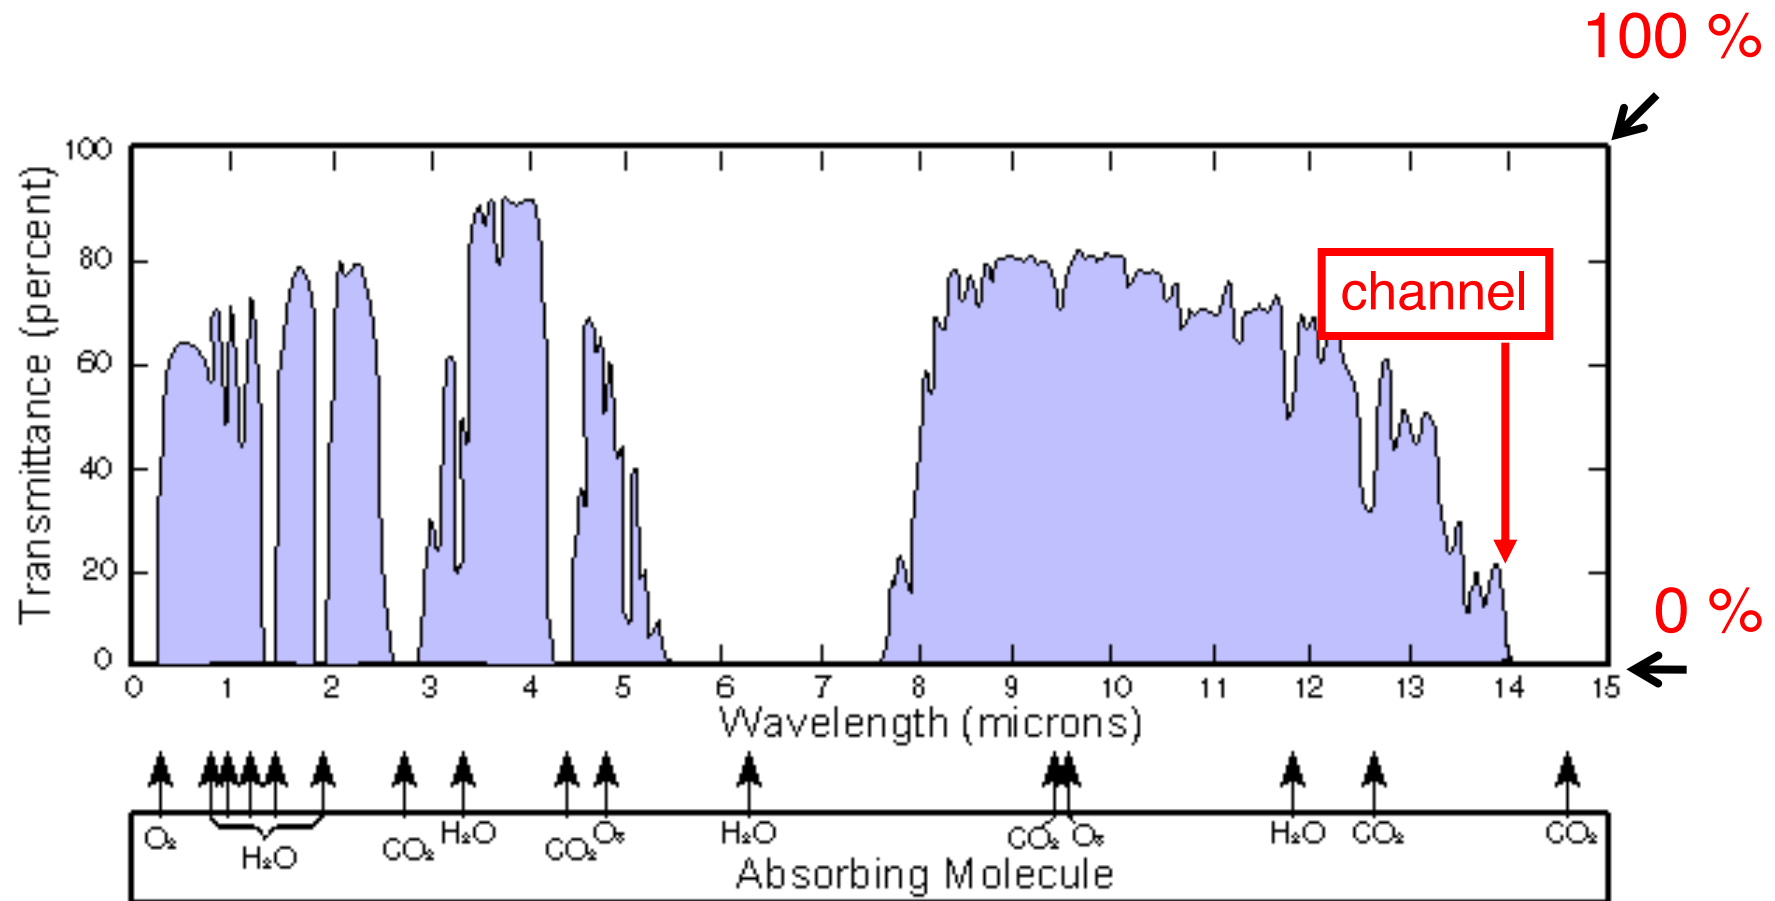


Weaker absorbing sounding channels

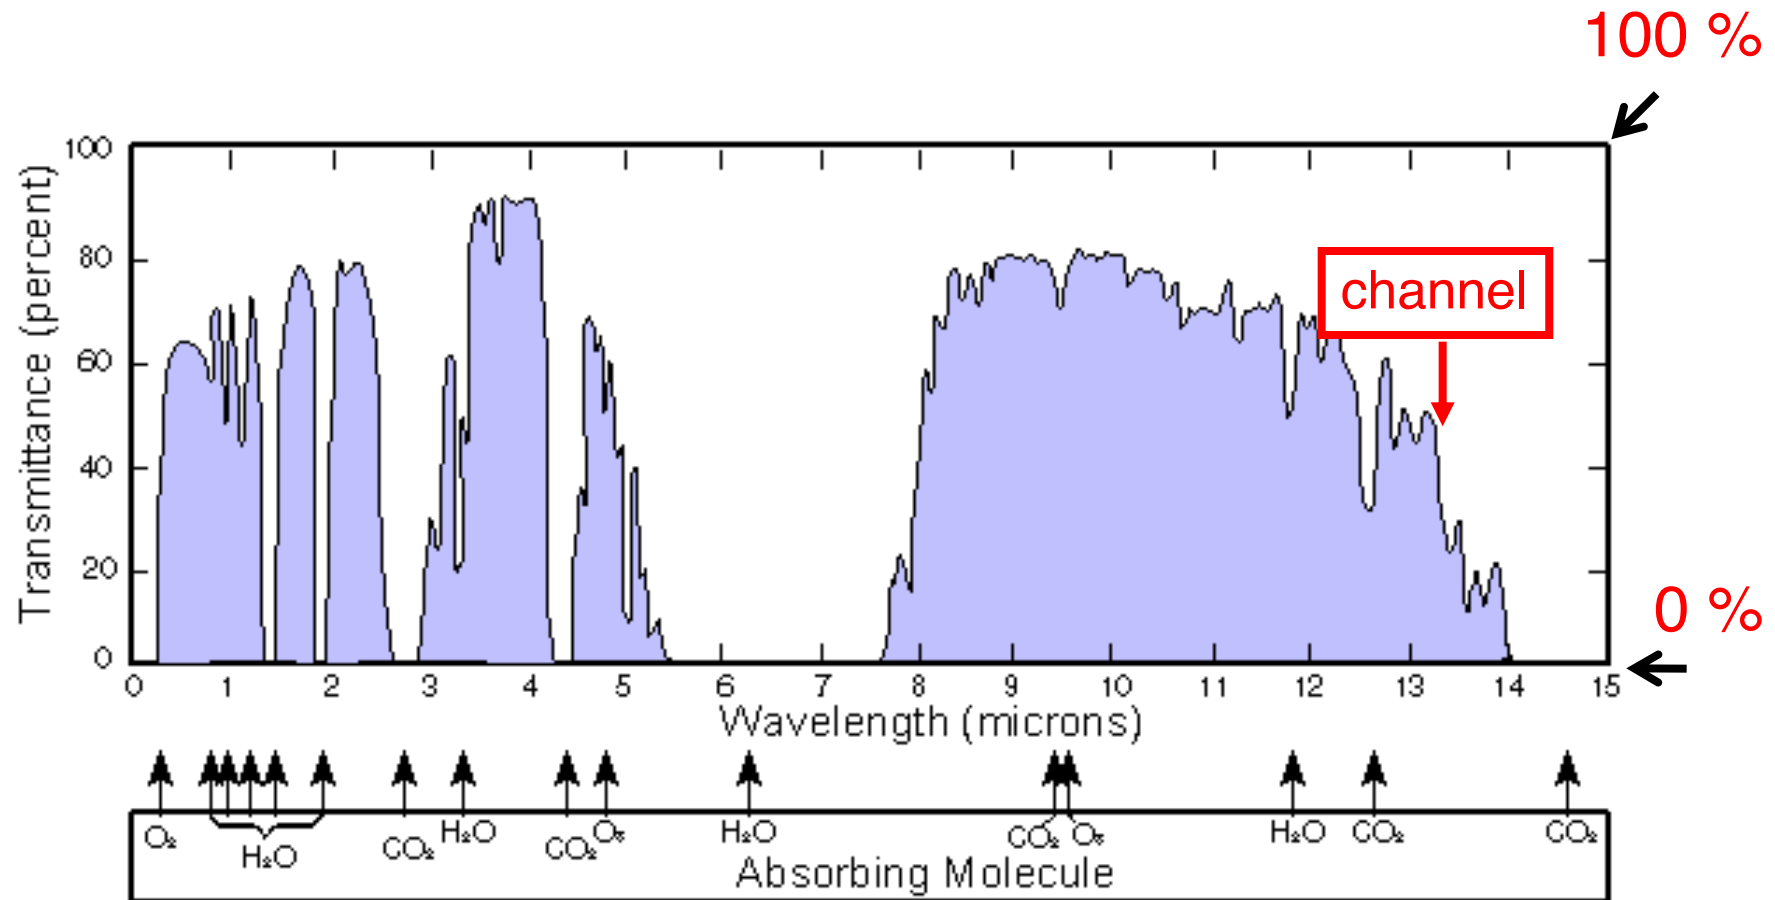



IASI weighting functions for strong and weak absorption channels

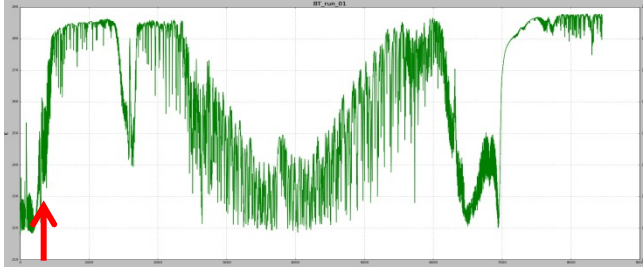

Strong > stratospheric channel

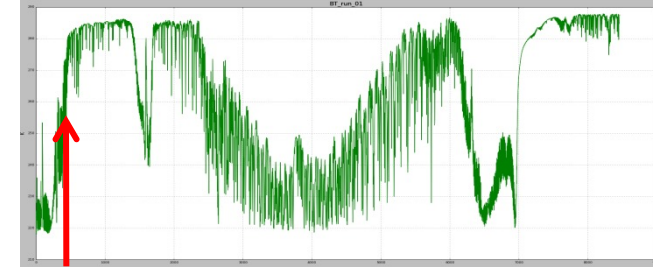


Weak > tropospheric channel

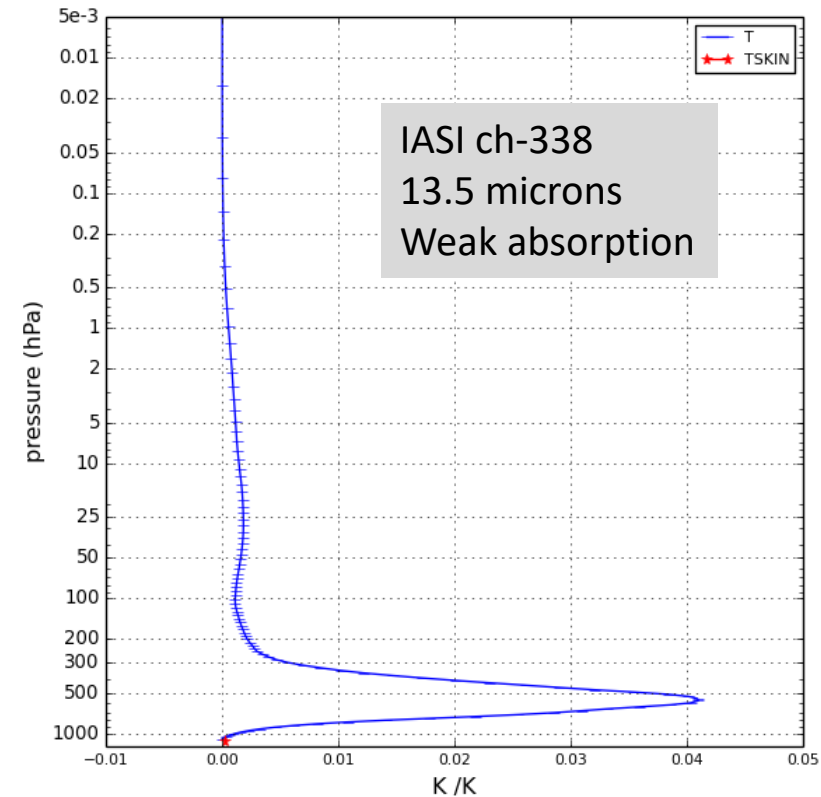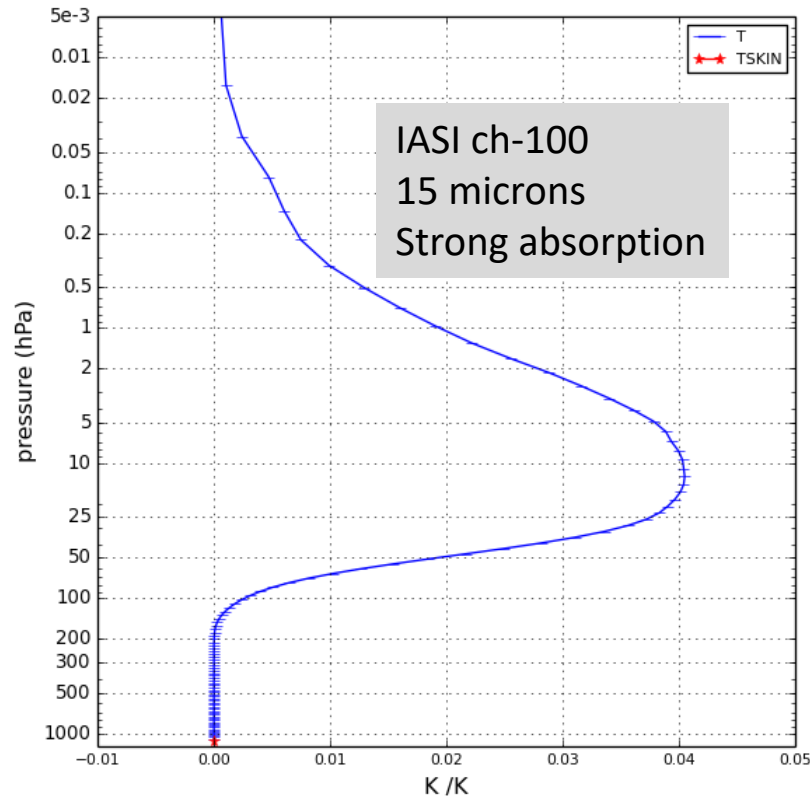


**Sampling lines of varying
absorption strength IASI
provides good vertical
coverage of the atmosphere**

Peaks altitudes of IASI channel weighting functions

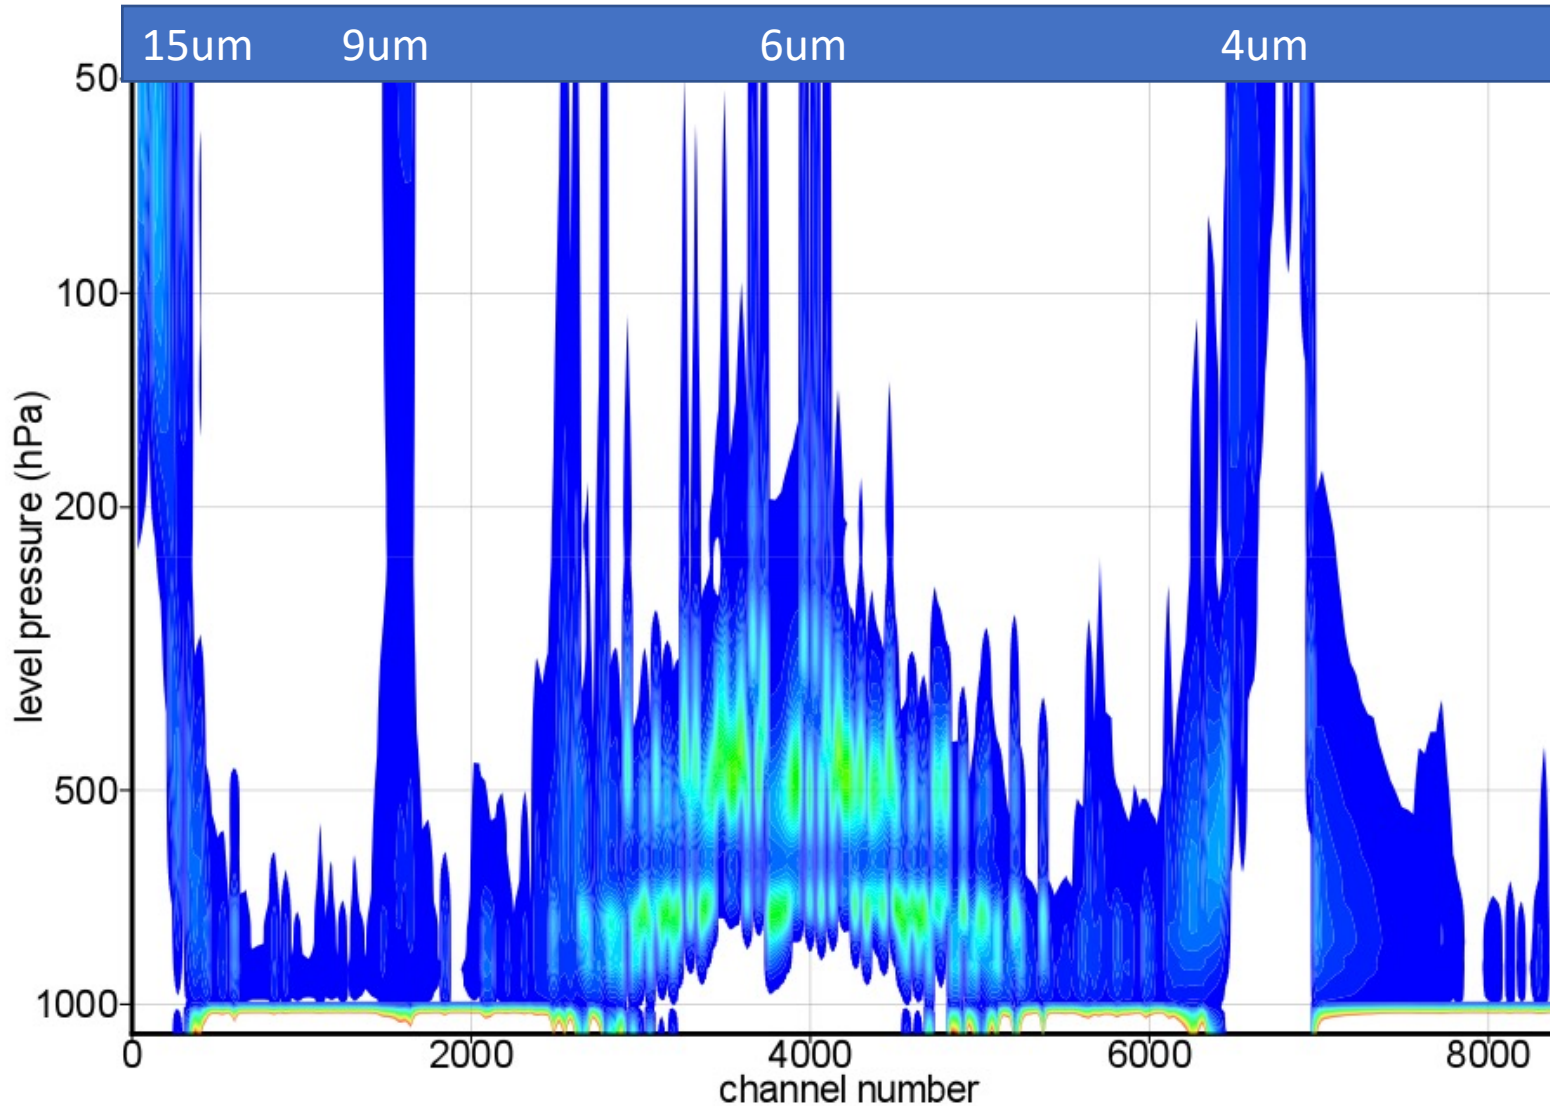

Peaks altitudes of IASI channel weighting functions

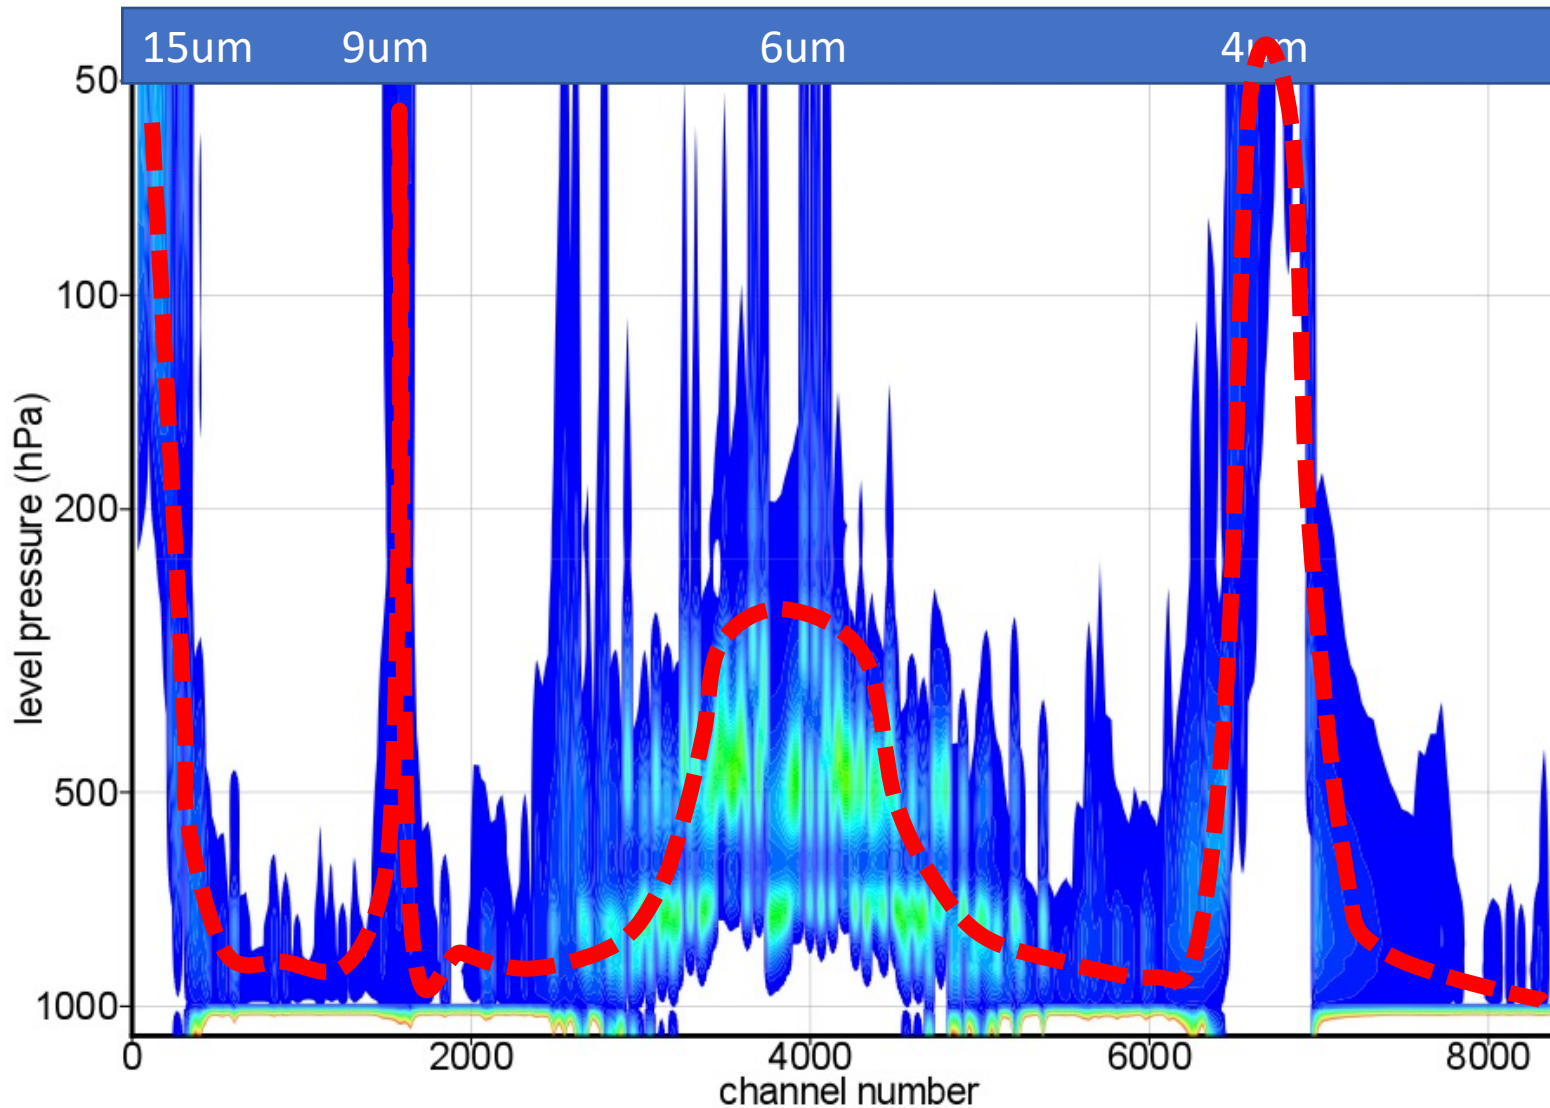


Three challenges to the successful assimilation of infrared radiances:

- 1) Sounding the lower atmosphere
- 2) Variable absorbing gasses
- 3) Clouds


Challenge 1:
**Sounding channels for the
lower troposphere ...**

Atmospheric sounding channels


...selecting channels where there is **no** contribution from the **surface**....
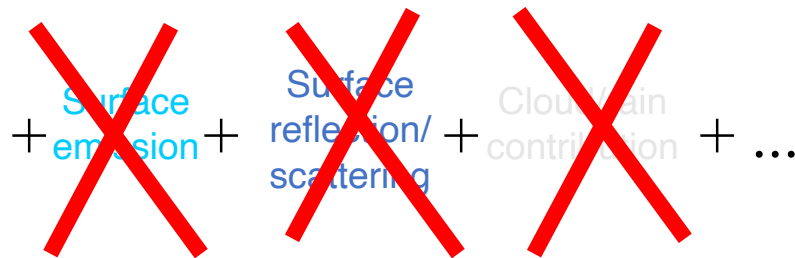
$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection/scattering} + \text{Cloud/rain contribution} + \dots$$


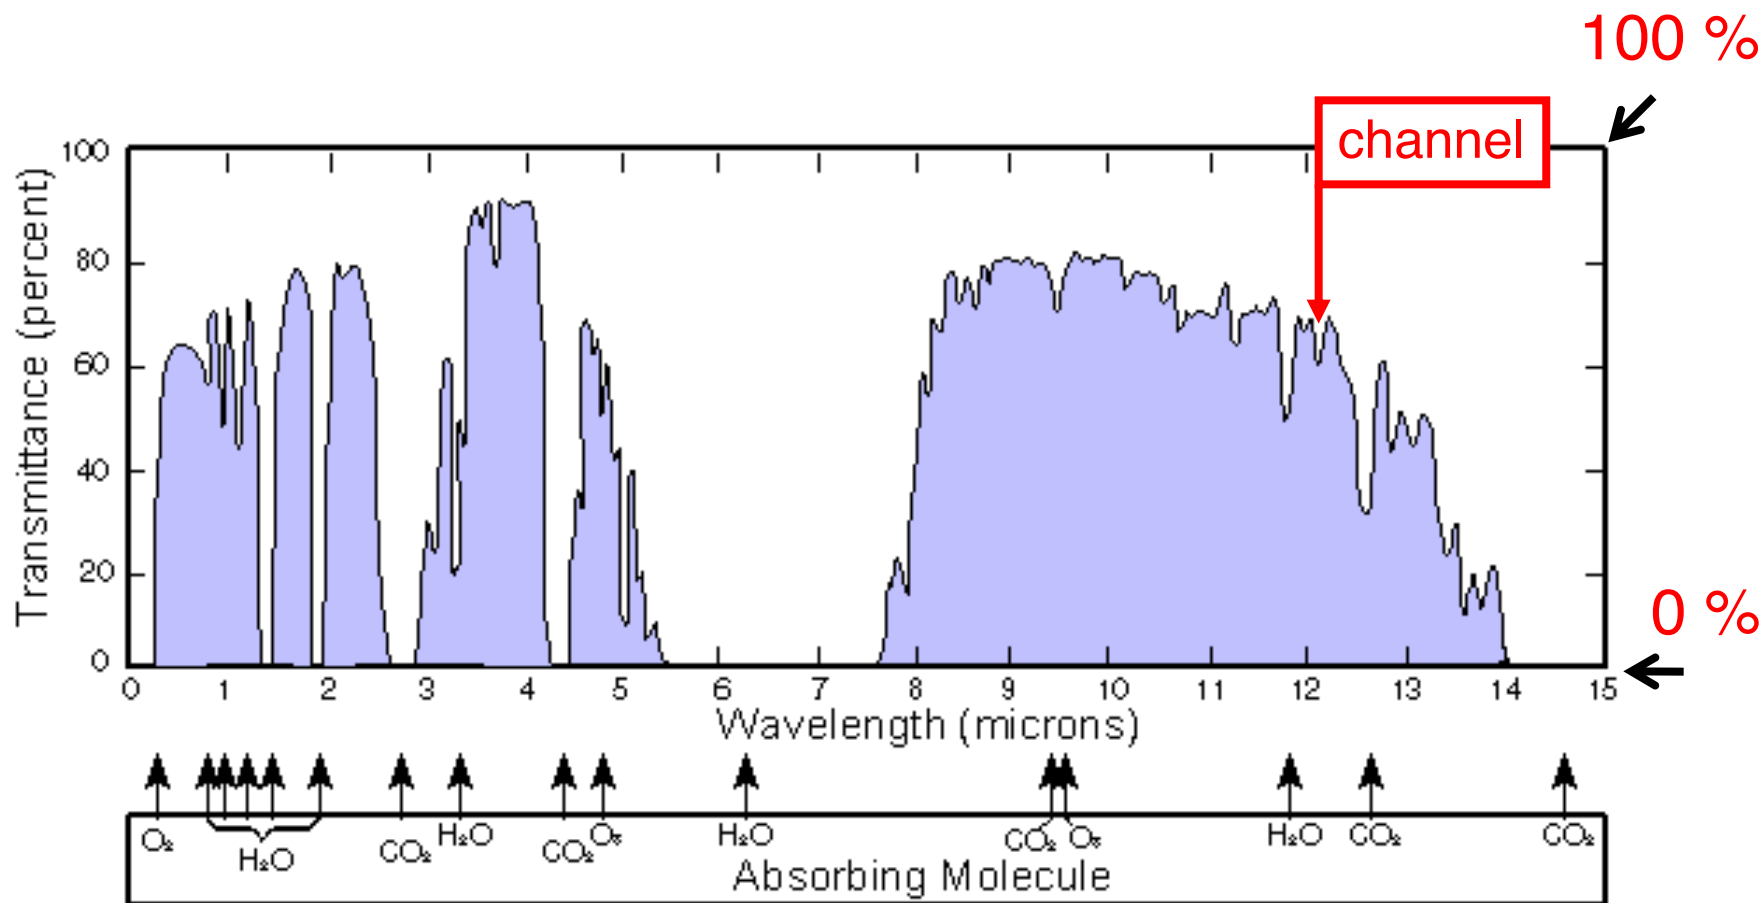
Strong absorbing sounding channels

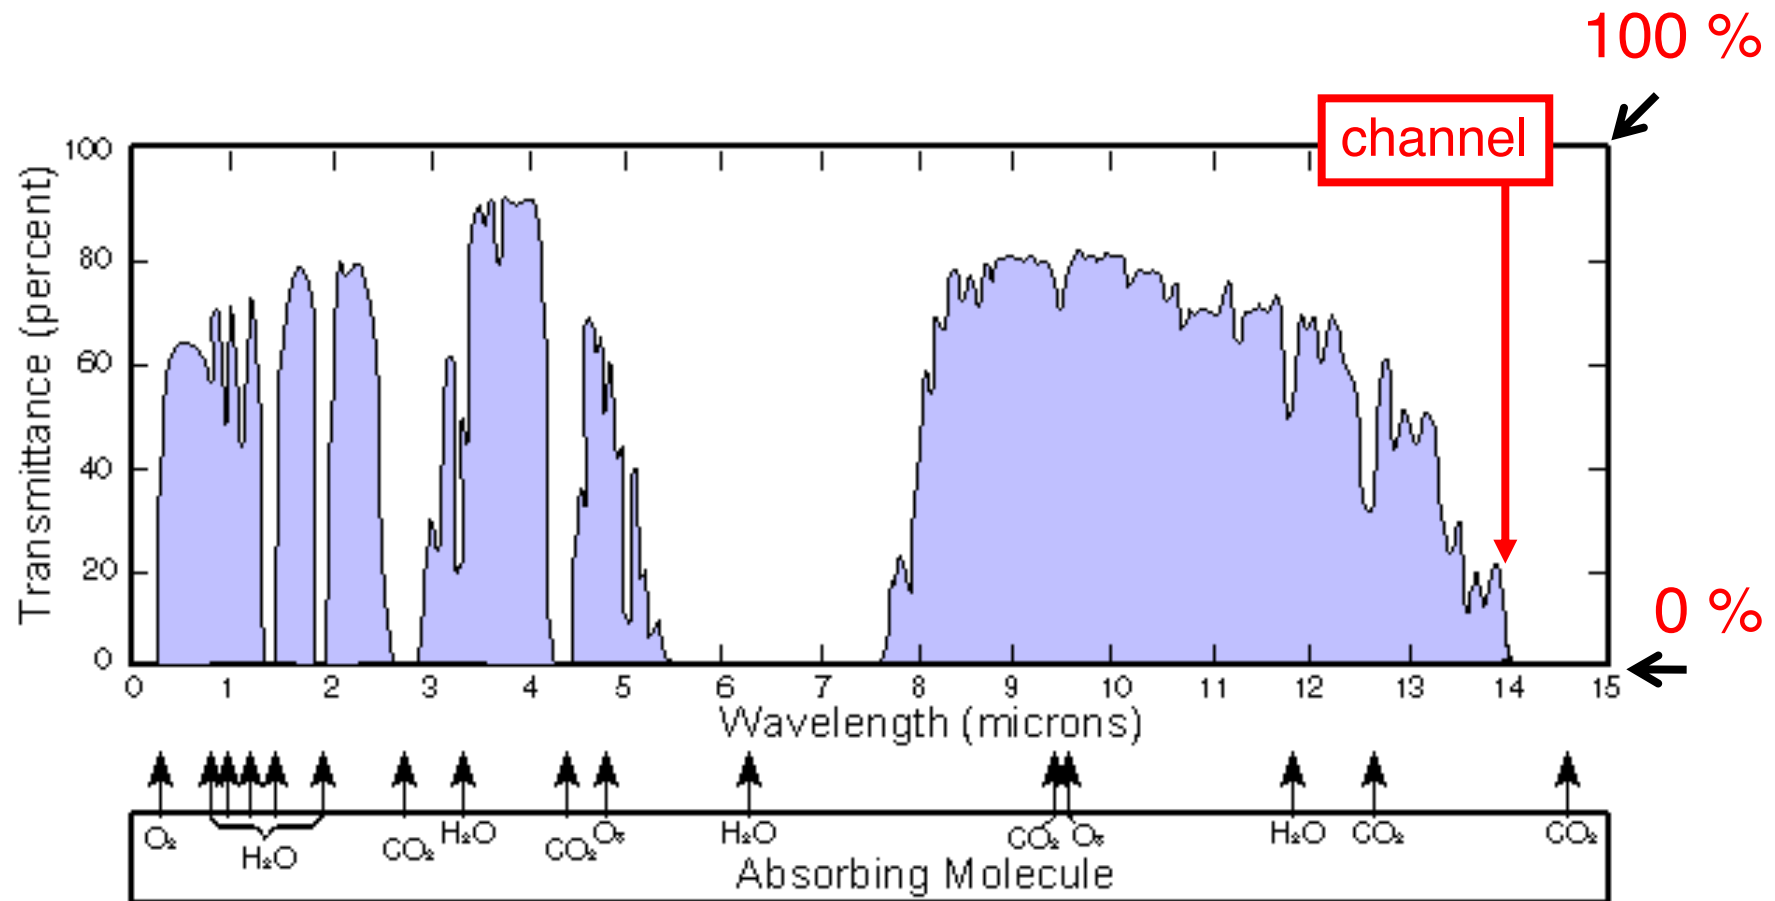

Weaker absorbing sounding channels

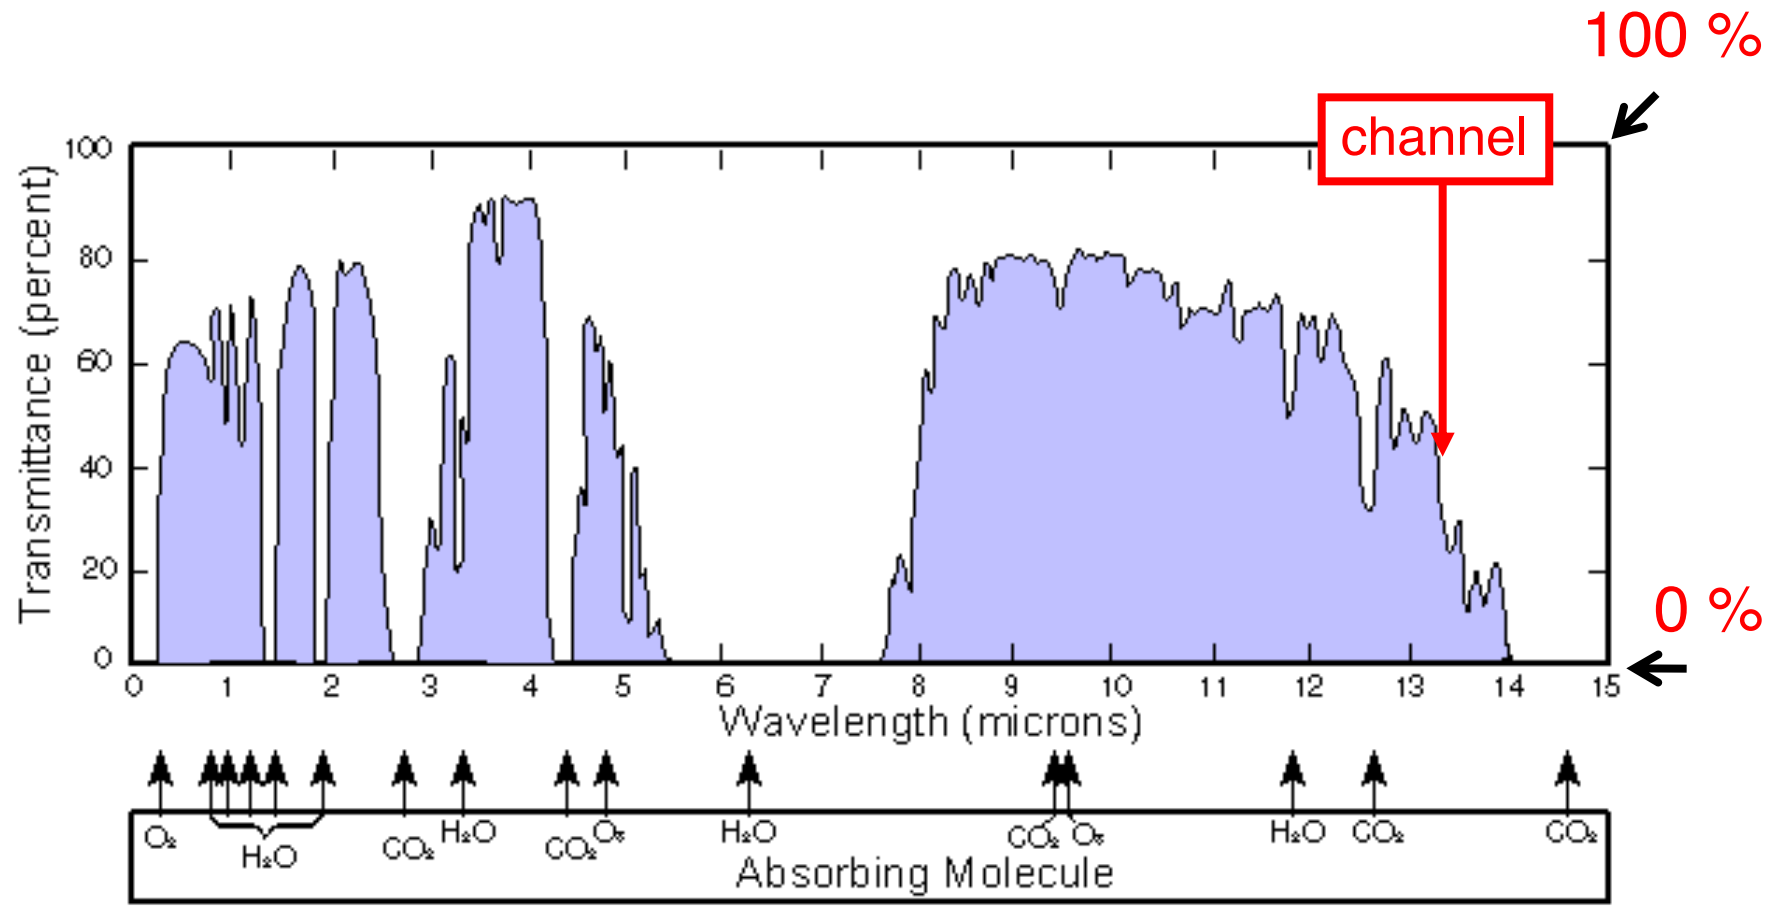

Weak absorbing sounding channels



Weak absorbing sounding channels


...selecting channels where there is **no** contribution from the **surface**....

$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection/scattering} + \text{Cloud/aerosol contribution} + \dots$$

The terms "Surface emission", "Surface reflection/scattering", and "Cloud/aerosol contribution" are crossed out with large red X's, indicating they are to be excluded in the selection of weak absorbing sounding channels.


Weak absorbing sounding channels

...selecting channels where there is **no** contribution from the **surface**....
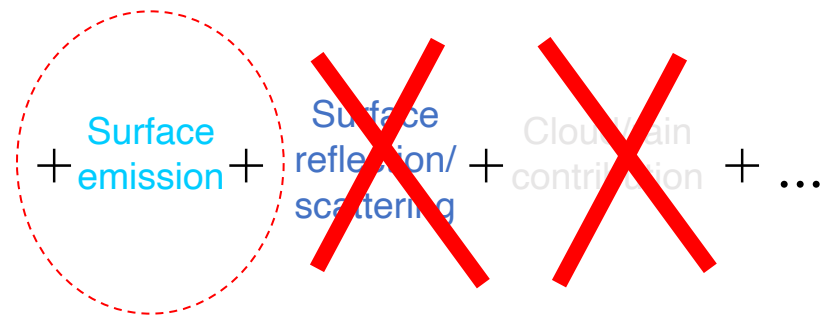
$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection/scattering} + \text{Cloud/rain contribution} + \dots$$


Weak absorbing sounding channels

...selecting channels where there is **no** contribution from the **surface**....
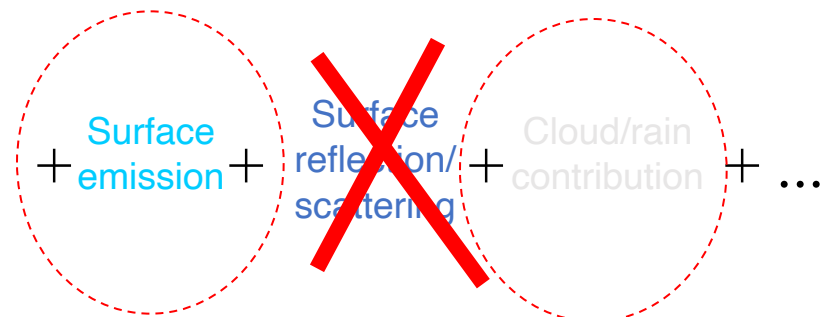
$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection/scattering} + \text{Cloud/rain contribution} + \dots$$


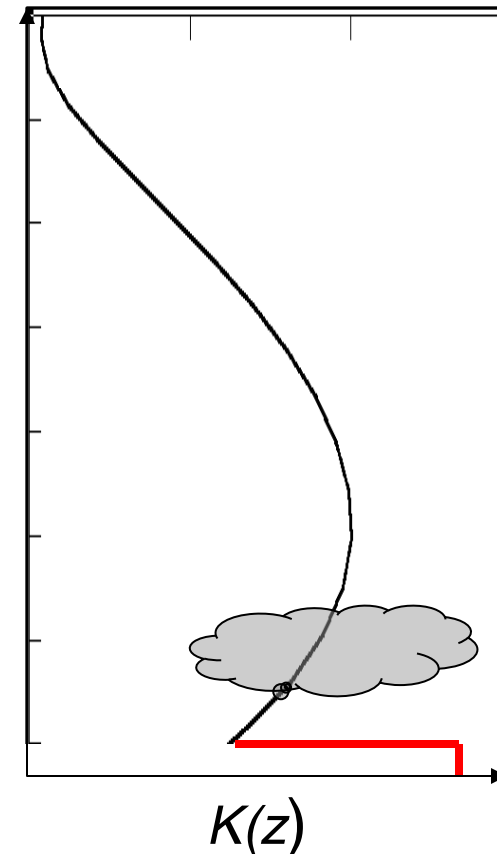
Sensitivity to the surface skin and clouds

By placing sounding channels in parts of the spectrum where the absorption is **weak** we obtain temperature (and humidity) information from the **lower troposphere** (low peaking weighting functions).


BUT ...

These channels (obviously) become more sensitive to surface emission and the effects of cloud and precipitation.


In most cases **surface or cloud** contributions will **dominate the atmospheric signal** in these channels and it is difficult to use the radiance data **safely** (i.e. we may alias a cloud signal as a temperature adjustment)





Lower Tropospheric Channels

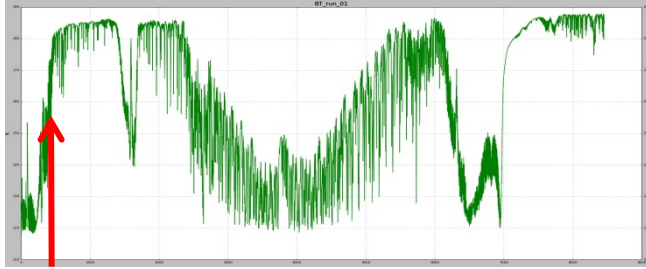


Tropospheric channel

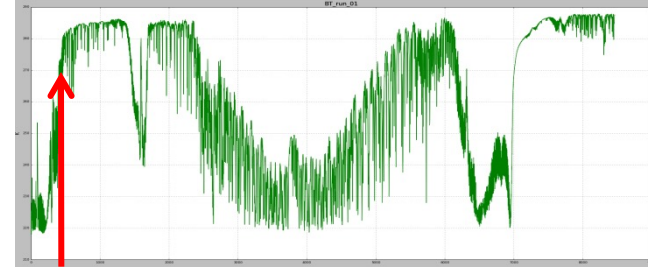


Low tropospheric channel

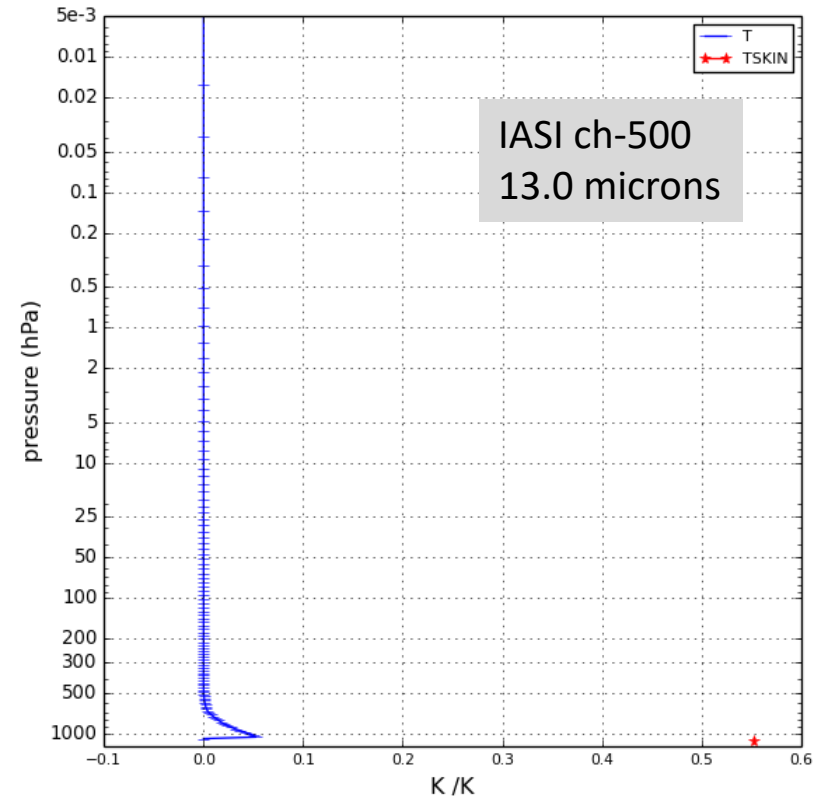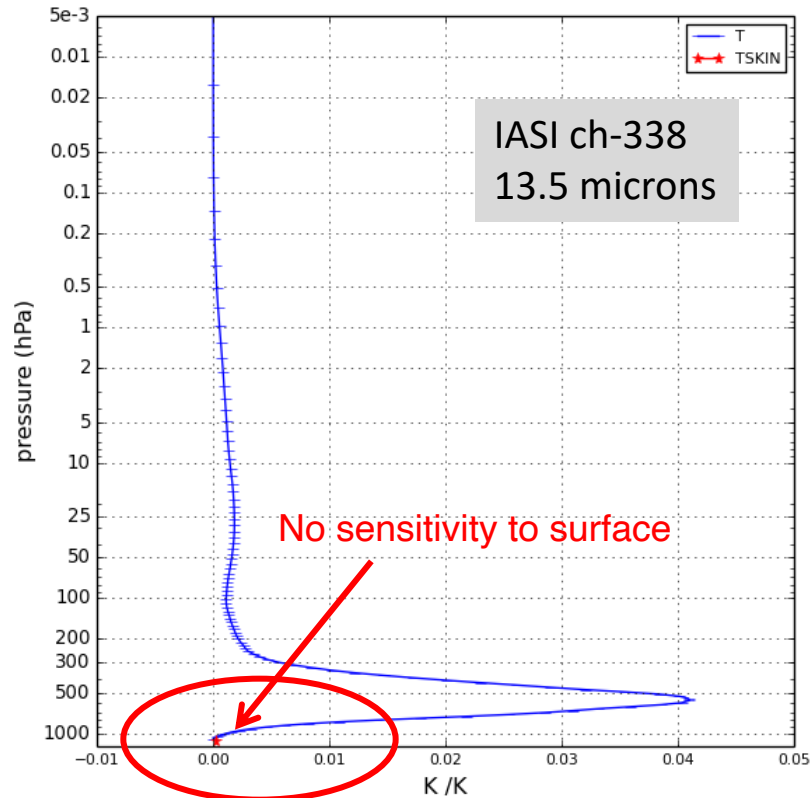



Lower Tropospheric Channels

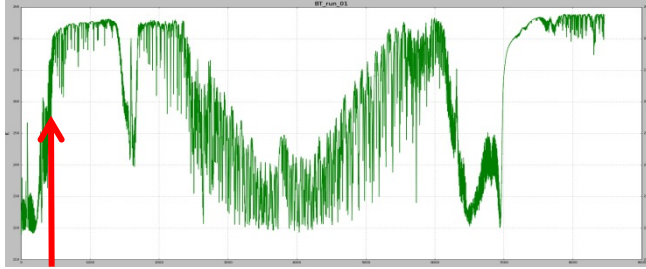

Tropospheric channel

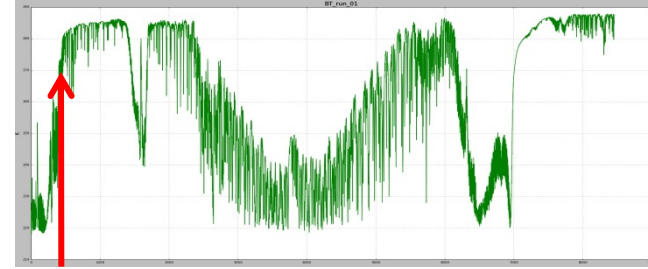

Low tropospheric channel

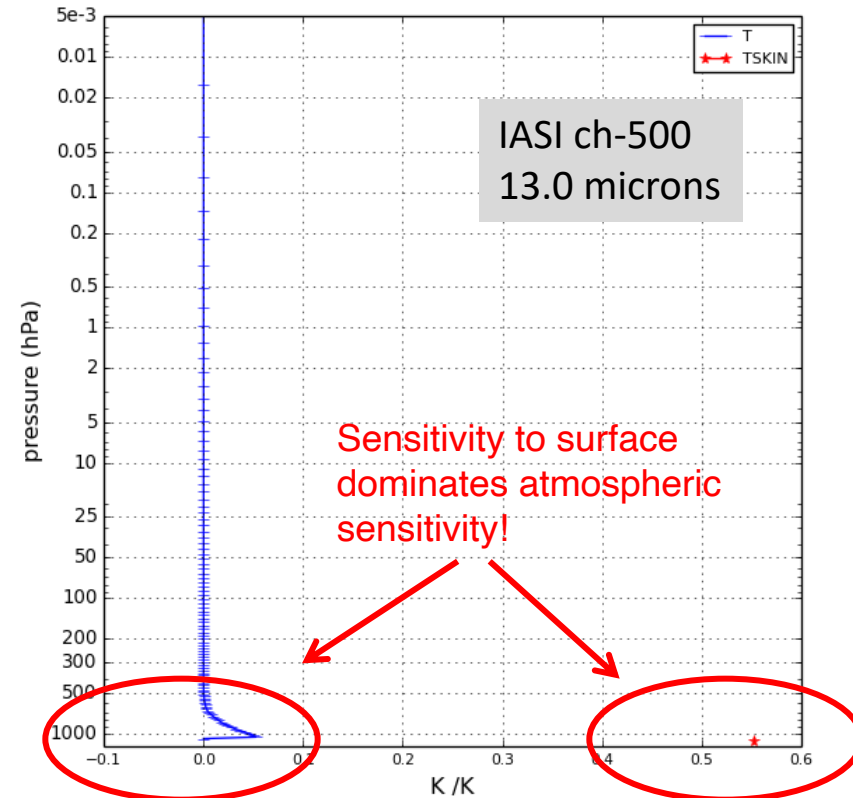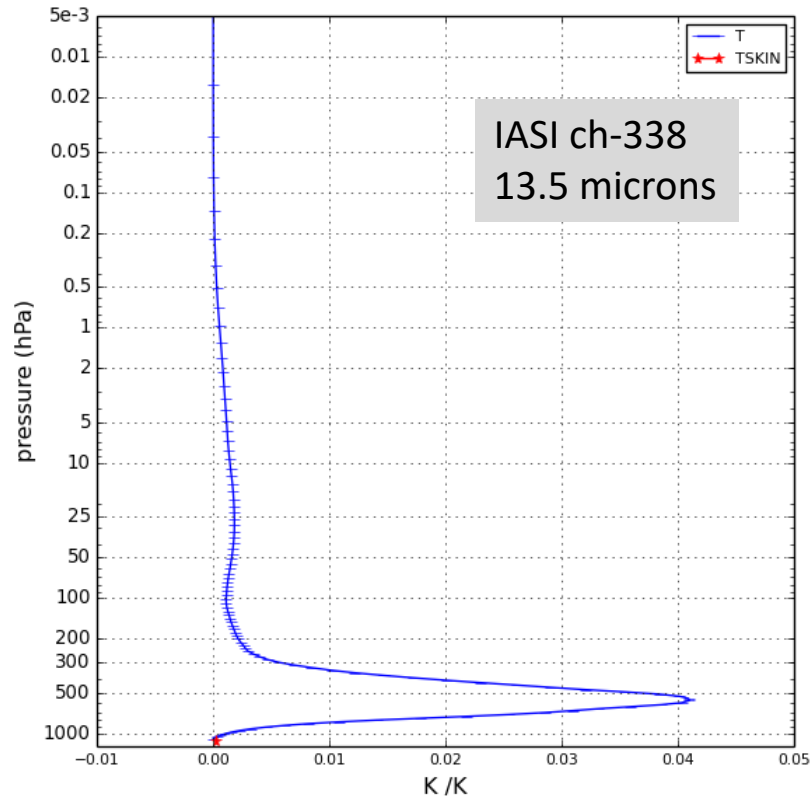

Challenge 2:
**When the absorbing gas
is itself a variable ...**

When the absorbing gas is itself a variable ...


When the primary absorber in a sounding channel is a **well mixed gas** (e.g. oxygen or carbon dioxide) the radiance essentially gives information about variations in the **atmospheric temperature profile only**.

$$L(\nu) = \int_0^{\infty} B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz$$


When the primary absorber is **not well mixed** (e.g. water vapour, ozone) the weighting functions **depend on the state** of the atmosphere and radiance gives **ambiguous** information about the temperature profile and the absorber distribution. This ambiguity must be resolved by :

- differential channel sensitivity
- synergistic use of well mixed channels (constraining the temperature)
- the background error covariance (+ physical constraints)

Temperature Channels sensitive to water vapour

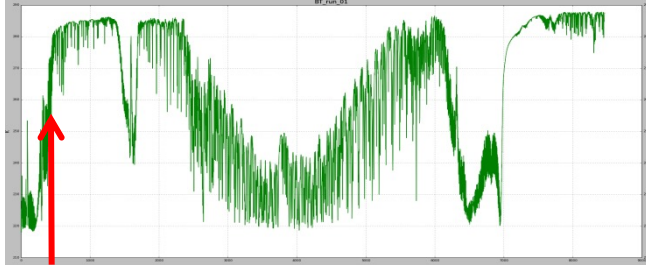


Tropospheric channel

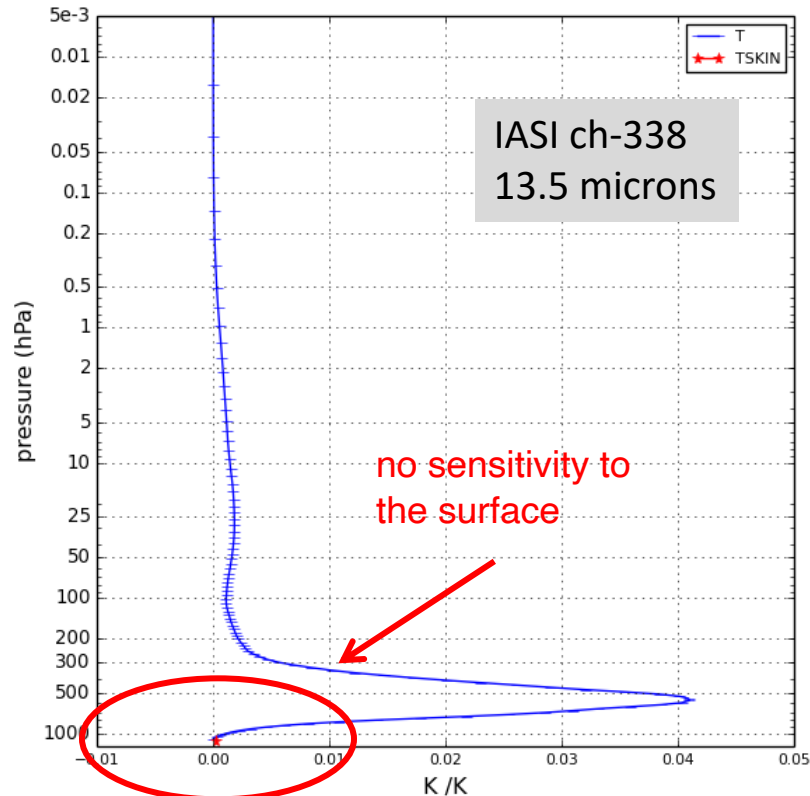


This is in a moist atmosphere...

What happens in a very dry atmosphere ?



Temperature Channels sensitive to water vapour

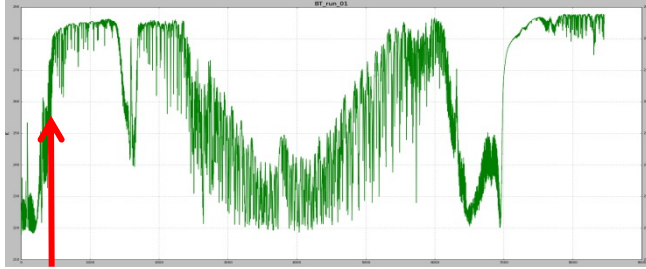


Tropospheric channel

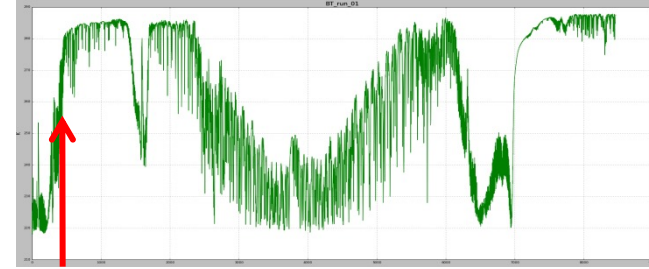


Tropospheric channel

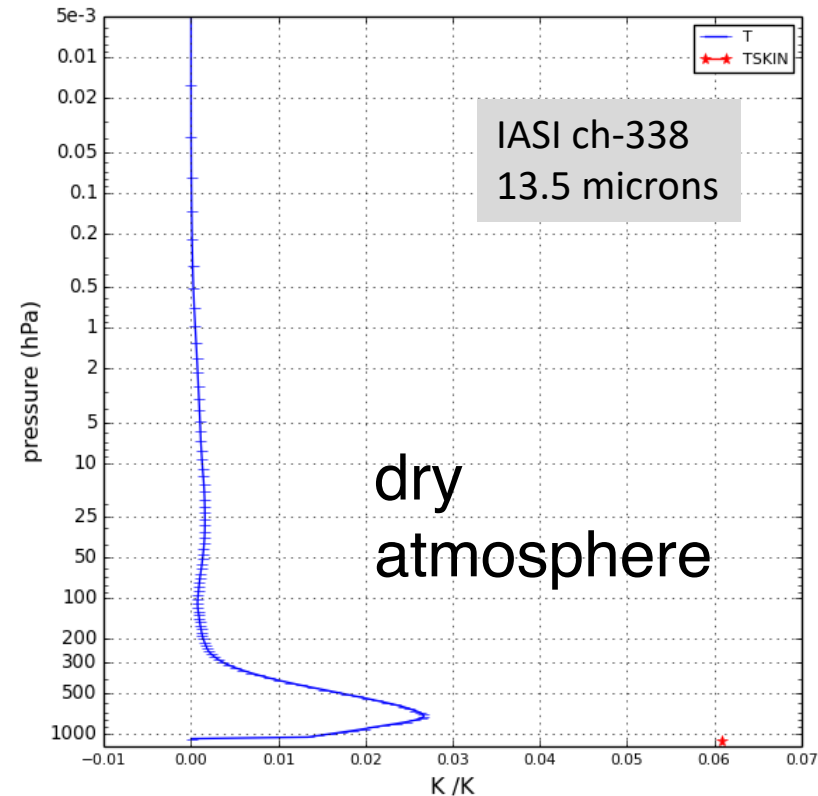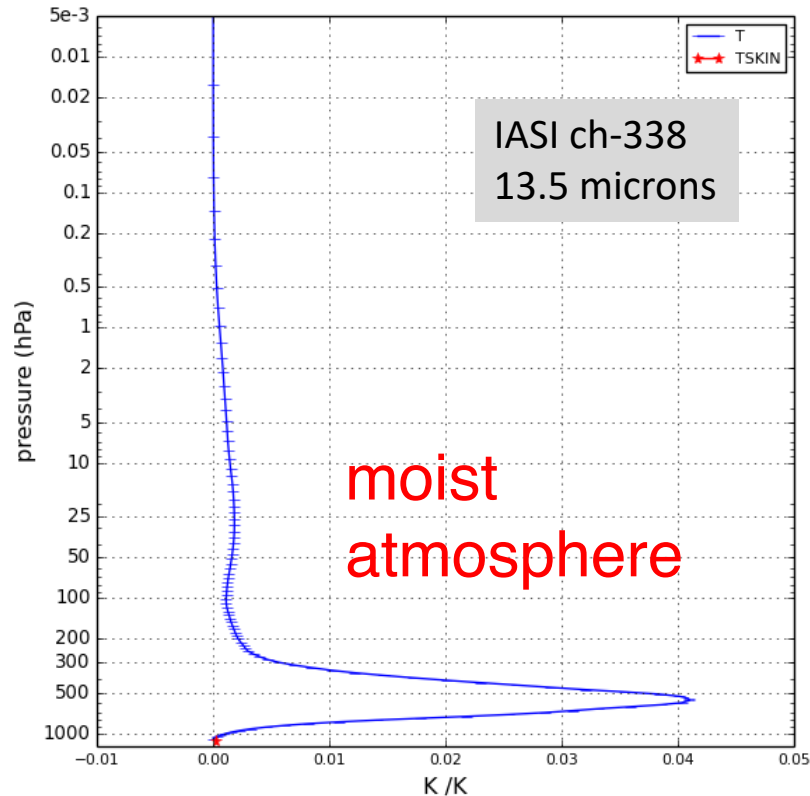



Temperature Channels sensitive to water vapour

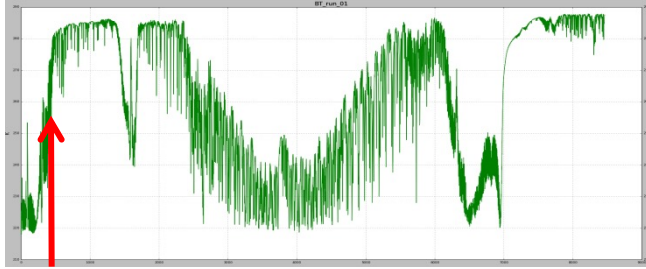

Tropospheric channel




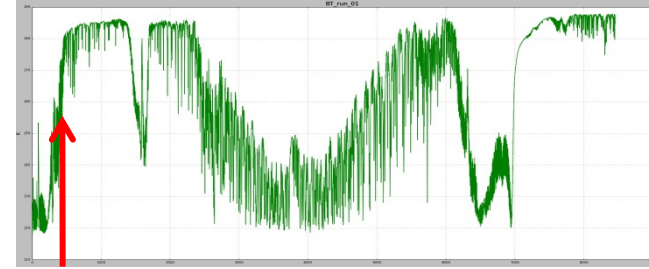


Tropospheric channel

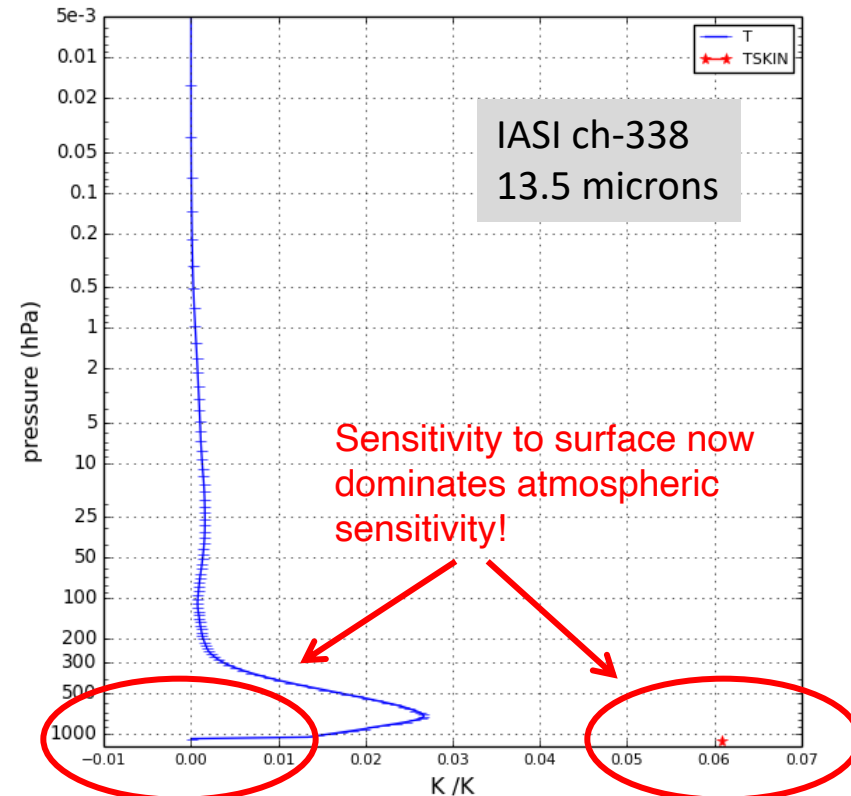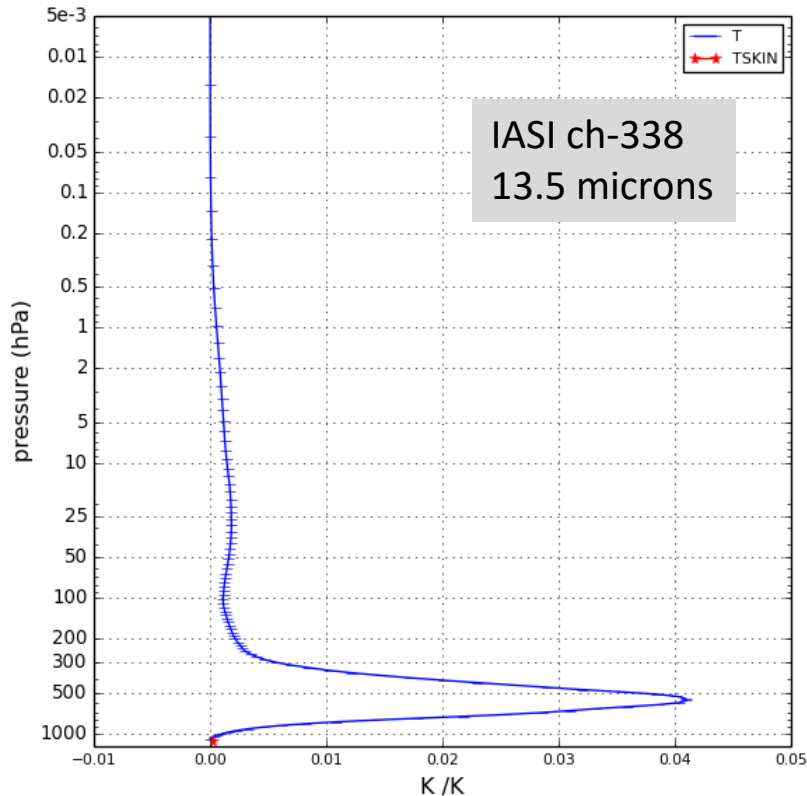


Window Channels sensitive to water vapour

IASI ch-1200
10.5 microns

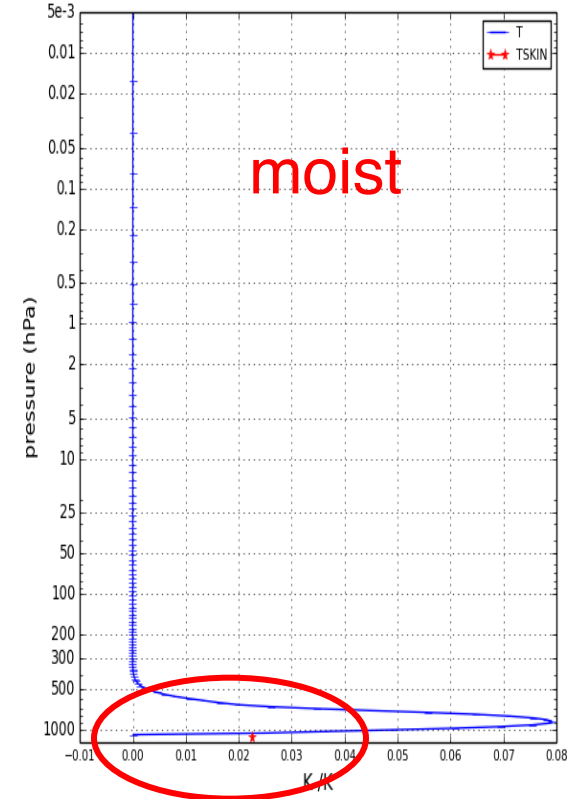
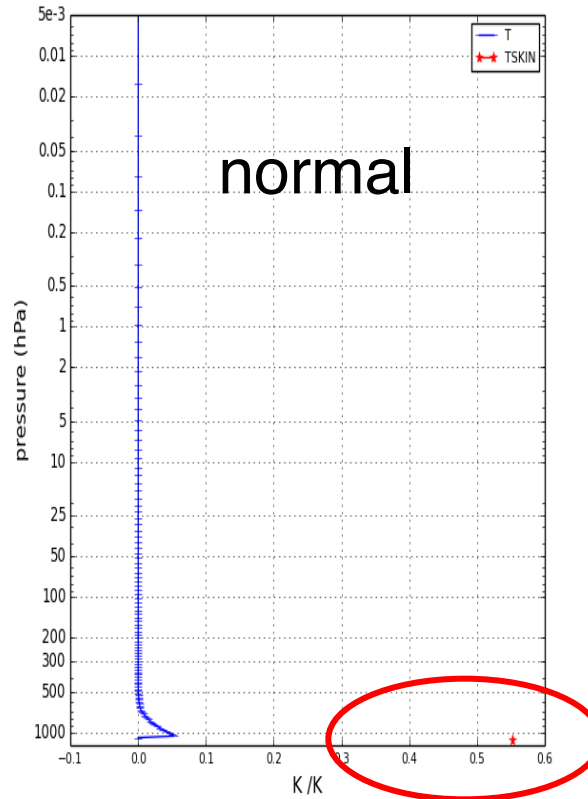
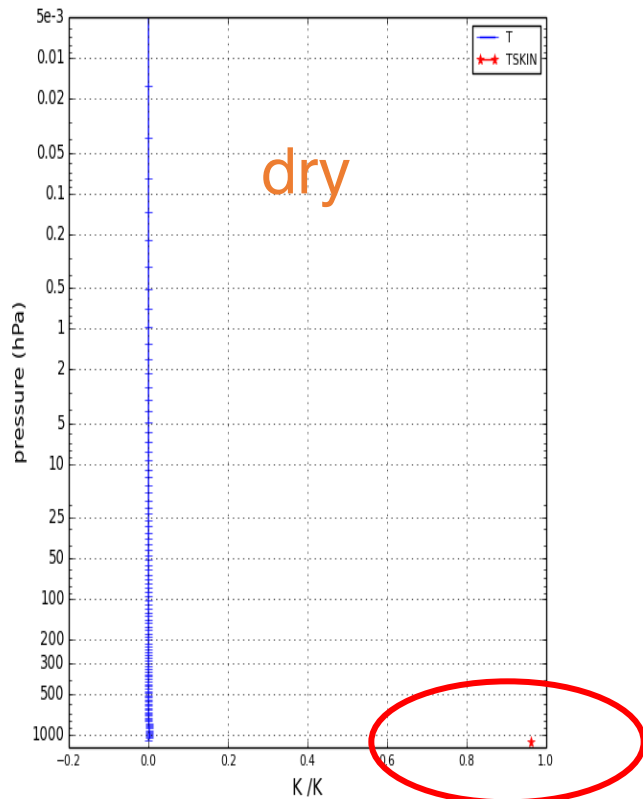
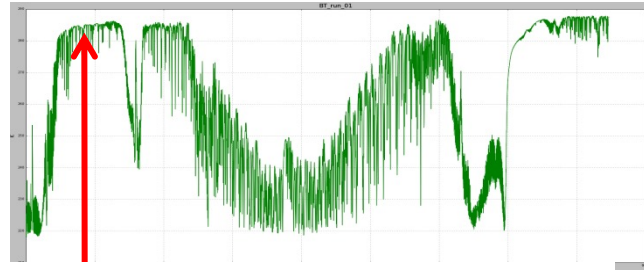


Challenge 3: **Clouds...**

Temperature Channels sensitive to clouds

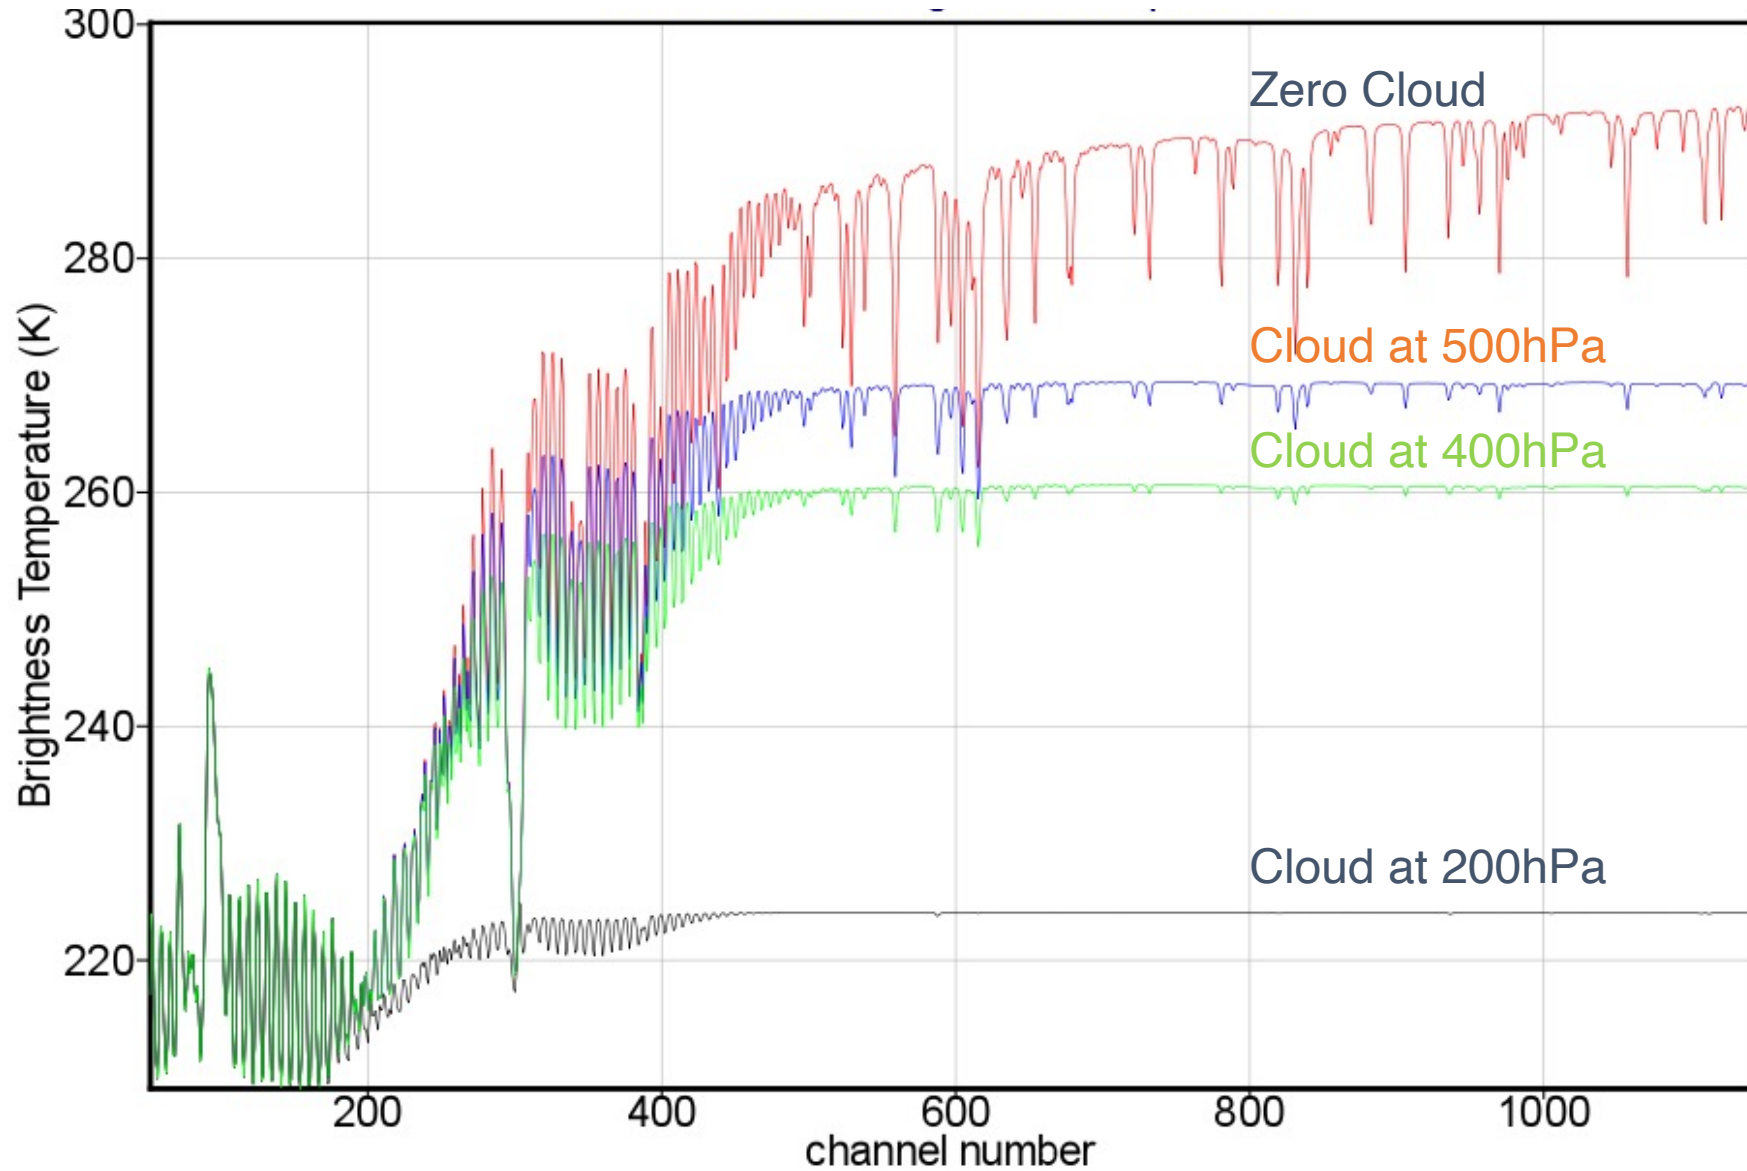

Temperature Channels sensitive to clouds

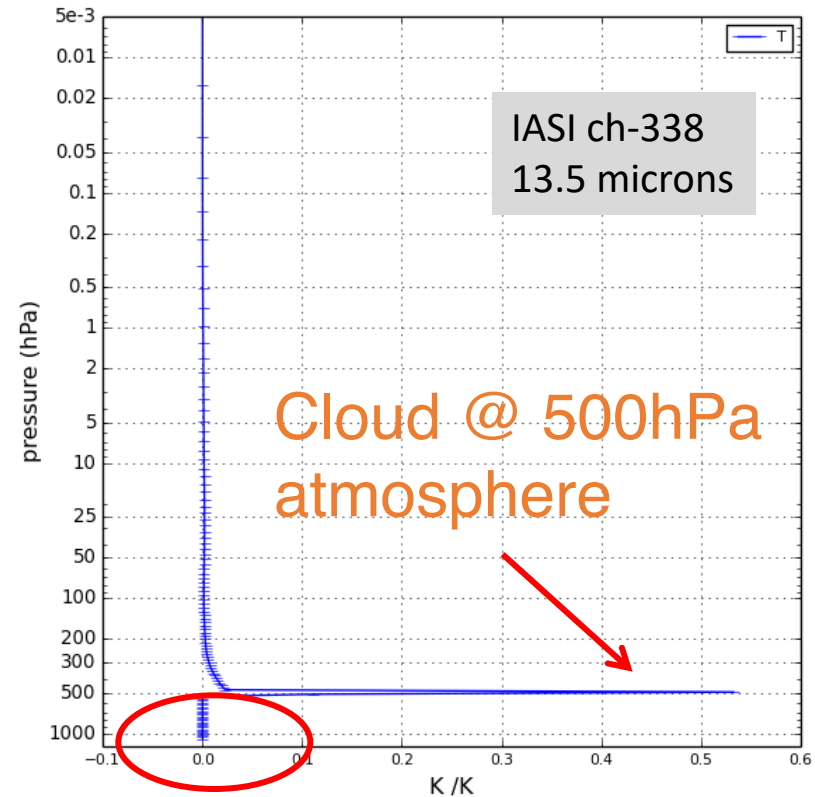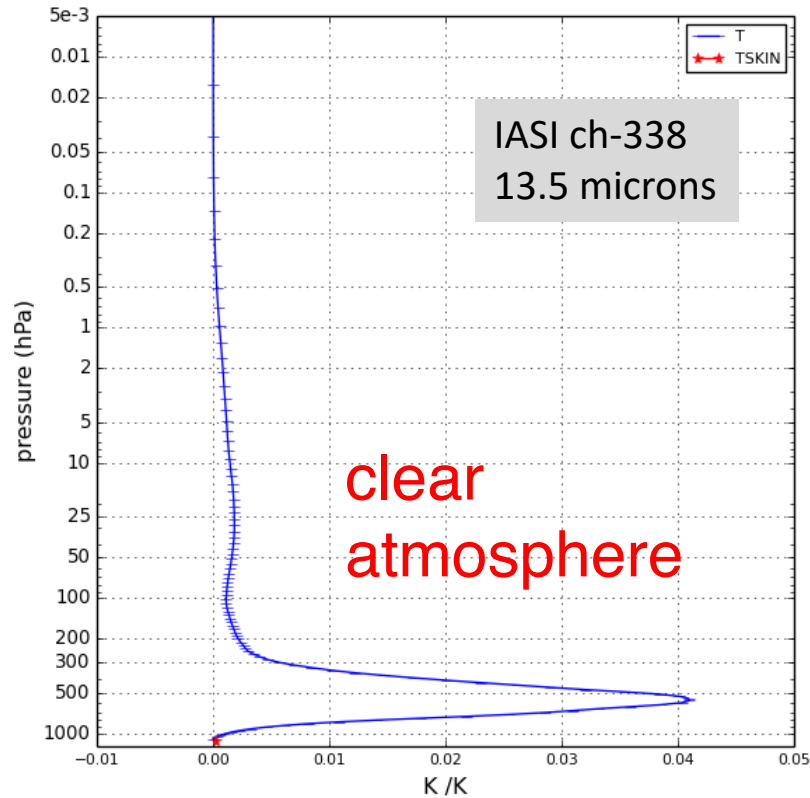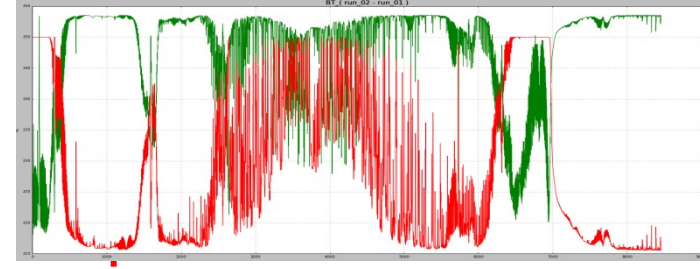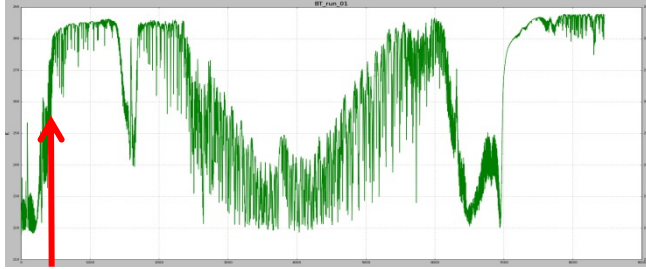

Challenge 3: **Clouds...**

Dedicated lecture on clouds in IR next.....

Summary

We now have excellent high quality (and **high spectral resolution**) measurements of atmospheric infrared radiation.

Instruments such as IASI provide good vertical coverage of the atmosphere by sampling absorption of variable strength. Higher **vertical resolution** is achieved due to the **high number of channels**.

Channels in the **lower troposphere** are also sensitive to the **surface** (and clouds).

Channels affected by absorption by **variable species** (e.g. humidity) provide different information in different atmospheres.

Questions ?

Units

$$\text{Radiance} = \text{W} \cdot \text{sr}^{-1} \cdot \text{m}^{-2} \cdot \text{Hz}^{-1}$$

Brightness temperature (K)

$$T_b = \frac{h\nu}{k} \ln^{-1} \left(1 + \frac{2h\nu^3}{I_\nu c^2} \right)$$